

410-83-266-41-105101

410-83-266-41-105101 Information

	ber 410-83-266-41-105101 Irer Preci-Dip	
Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Description	n SIL SOLDER TAIL 2.54MM	
Package	-	
For Reference Only	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



410-83-266-41-105101 Specifications

Manufacturer Part Number410-83-266-41-105101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Contact TypeSocketContact TypeBoard to BoardNumber of Positions66Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Munting TypeSolderStrate Mounting TypeSolderStrate Mounting TypeSolderContact Finish - MatingGoldStrate Mounting TypeSolderStrate Mounting TypeSolderStrate Mounting TypeSolderStrate Mounting TypeSolderStrate Mounting TypeSolderStrate Finish - Mating0.20° (5.0mm)Strate Finish Thickness - Mating0.20° (5.0mm)Strate Type TypeSolderStrate Type Type TypeSolderStrate Type Type Type Type Type Type Type Typ				
CategoryConnectors. InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows0.100° (2.54mm)Number of RowsSocketStriace Mounting TypeSurface MountFerninationSolderContact Finish - MatingO.dol (2.54mm)Contact Finish - MatingGoldContact Finish - MatingSolderSustation ColorBlackInsulation Rows2.9.5µin (0.75µm)Insulation Finish Thickness - Mating0.20° (5.60mm)Insulation Height0.20° (5.60mm)Contact Length - Post-Surface Solder-Surface Solder-Surface Solder-Surface Solder-Surface Solder-Surface Solder-Solder-Solder-Surface Solder-Surface Solder-Surface Solder-Solder-Solder-Solder-Solder-Solder-Solder-Solder-Solder-Solder-Solder-Solder <td>Manufacturer Part Number</td> <td>410-83-266-41-105101</td>	Manufacturer Part Number	410-83-266-41-105101		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating9.5yin (0.75µm)Insulation ColorBlackInsulation Height0.200" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Manufacturer	Preci-Dip		
Package-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSolderTerminationSolderStating TypeSolderContact Finish - MatingGoldContact Finish - Mating9.5jni (0.75µm)Insulation ColorJackInsulation FinishSolderSolderSolderSolder Sensen Sense	Category	Connectors, Interconnects		
Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - Mating9.501 (0.75µm)Insulation ColorBackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSolderTerminationSolderSolderSolderContact Finish - MatingGoldSontact Finish - MatingGoldSoltar Of SolurionBlackInsulation Color0.20" (5.60mm)Sontact Length - Post-Sontact Length - Post-Sontact Length - Post-Sontact Solurion-Sontact Length - Post-Sontact Length - Post-Sontact Solurion-Sontact Length - Post-Sontact Solurion-Sontact Length - Post-Sontact Length - Post-Sontact Solurion-Sontact Solurion-Sontact Length - Post-Sontact Length - Post-Sontact Solurion-Sontact Solurion-Sontact Solurion-Sontact Length - Post-Sontact Solurion-Sontact Solurion-Sontact Solurion-Solurion-Solurion-Solurion-Solurion-Solurion-Solurion-Solurion-So	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating60dInsulation ColorBlackInsulation Height0.20" (5.60mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Series	410		
StyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypeSolderContact Finish - MatingGoldInsulation ColorJackInsulation Height0.220° (5.60mm)Contact Length - Post-Speraring Type-Solder- <td< td=""><td>Connector Type</td><td>Socket</td></td<>	Connector Type	Socket		
Number of Positions 66 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Termination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 9.5µin (0.75µm) Insulation Color Black Insulation Height 0.220" (5.60mm) Contact Length - Post - Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorD.20" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorJ.220" (5.60mm)Contact Length - Post-55°C ~ 125°C	Number of Positions	66		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating9.5µin (0.75µm)Insulation ColorBlackInsulation Height0.20" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Mounting Type	Surface Mount		
Contact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	29.5µin (0.75µm)		
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.220" (5.60mm)		
	Contact Length - Post	-		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

410-83-266-41-105101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

410-83-266-41-105101 Payment Methods

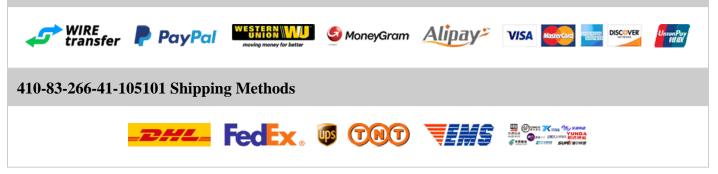

If you have any question about 410-83-266-41-105101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com