

410-87-214-41-105191

410-87-214-41-105191 Information

	art Number Ianufacturer	410-87-214-41-105191 Preci-Dip	
C:	ategory	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
De	escription	SIL SOLDER TAIL 2.54MM	2
Pa	ackage	-	回過愛難
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



410-87-214-41-105191 Specifications

Manufacturer Part Number410-87-214-41-105191ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPirch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Contact Length - Post-Strice - 125°C-Material Elemmability Rating110 4 V-0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Connector TypeSocketContact TypeBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220° (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Manufacturer Part Number	410-87-214-41-105191
ImageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.20" (5.60mm)Contact Length - Post-Solar Contact Length - Post-Solar Contact Finish Thickness - MatingSolarInsulation Height0.20" (5.60mm)Contact Length - Post-Solar Contact Length - Post-<	Manufacturer	Preci-Dip
Package-Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Category	Connectors, Interconnects
Series410Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Series	410
StyleBoard to BoardNumber of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Socket
Number of Positions14Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions	14
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.220" (5.60mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	Flash
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature -55°C ~ 125°C	Insulation Height	0.220" (5.60mm)
	Contact Length - Post	-
Material Flammability Rating UII 94 V-0	Operating Temperature	-55°C ~ 125°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Pick and Place
	Report errors?

410-87-214-41-105191 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

410-87-214-41-105191 Payment Methods

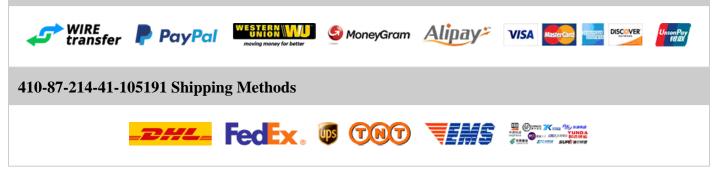

If you have any question about 410-87-214-41-105191, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com