

416-87-240-41-006101

416-87-240-41-006101 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



416-87-240-41-006101 Specifications

Manufacturer Part Number416-87-240-41-006101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketConnector TypeSocketSordet DipBoard to BoardNumber of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingSolderMounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldRouse - MatingGoldNumber of ColorBackFastening TypeBackRouse - MatingSolderFastening TypeBackInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Ernish - NatingDi.26" (3.20mm)Contact Length - PostDi.26" (3.20mm)				
CategoryConnectors. InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleForminationSolderForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldIsulation ColorHashIsulation Finish - MatingIsulaIsulation ColorBackIsulation Height0.23° (6.00mm)Isulation Height0.126° (3.20mm)Isulation Height0.126° (3.20mm)	Manufacturer Part Number	416-87-240-41-006101		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Youngh ForminationSolderFerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Manufacturer	Preci-Dip		
Package-Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeOldor (2.54mm)TerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.236° (6.00mm)Contact Length - Post0.126° (3.20mm)	Category	Connectors, Interconnects		
Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.236° (6.00mm)Contact Length - Post0.126° (3.20mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236° (6.00mm)Contact Length - Post0.126° (3.20mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOloo" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorHashInsulation ChergetBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.102" (3.20mm)	Series	416		
StyleBoard to BoardStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Connector Type	Socket		
Number of Positions40Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Number of Positions	40		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Contact Finish - Mating	Gold		
Insulation Height0.236" (6.00mm)Contact Length - Post0.126" (3.20mm)	Contact Finish Thickness - Mating	Flash		
Contact Length - Post 0.126" (3.20mm)	Insulation Color	Black		
	Insulation Height	0.236" (6.00mm)		
0 · · · · · · · · · · · · · · · · · · ·	Contact Length - Post	0.126" (3.20mm)		
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

416-87-240-41-006101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

416-87-240-41-006101 Payment Methods

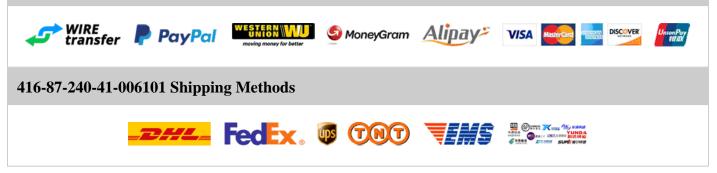

If you have any question about 416-87-240-41-006101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com