

416-87-262-41-001101

416-87-262-41-001101 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



416-87-262-41-001101 Specifications

Manufacturer Part Number416-87-262-41-001101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketContact TypeBoard to BoardStyleBoard to BoardNumber of Positions62Number of Positions Loaded1010° (2.54mm)Number of Rows2Rowspacing - MatingNilon' (2.54mm)Mounting TypeSolderTerminationSolderSteining TypeSolderSteining TypeSolderContact Finish - MatingSolderSteining TypeSolderSteining TypeSolder <tr< th=""><th></th><th></th></tr<>				
CategoryConnectors. InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketContact TypeBoard to BoardNumber of Positions62Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingFashSolderGoldSultion ColorBlackInsulation ColorSoler' (3.00mm)Contact Length - Post0.591° (15.00mm)Contact Length - Post0.126° (3.20mm)Contact Length - Post0.55° C ~ 125°C	Manufacturer Part Number	416-87-262-41-001101		
Indext Connectors - Headers, Receptacles, Female SocketsPackage-Series416Connector TypeSocketContact TypeBoard DoardStyleBoard to BoardNumber of Positions62Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Nounting Type0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Nounting TypeSolderTerminationSolderFording TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorHashInsulation Finish - MatingSolderInsulation ColorJackInsulation Finish - MatingSolderInsulation Finish - MatingSolderInsulation ColorSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolder <td>Manufacturer</td> <td colspan="3">Preci-Dip</td>	Manufacturer	Preci-Dip		
Package-Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Yourge TypeSockerContact Finish - MatingSockerContact Finish - MatingGoldContact Finish Thickness - MatingFashInsulation ColorBlackInsulation Height0.591° (15.00mn)Contact Length - Post0.126° (3.20mm)Operating Temperature-55° C ~ 125°C	Category	Connectors, Interconnects		
Series416Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBlackInsulation ColorSols" (15.00mm)Contact Length - Post0.59" (15.00mm)Contact Length - Post0.126" (3.20mn)Contact Fungeruture55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions62Number of Positions LoadedAllNumber of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)TerminationSolderFastening TypeWash-PullContact Finish - MatingGoldSoltart Finish - MatingGoldInsulation ColorFashInsulation Height0.59° (15.00mm)Contact Fungt-Post0.126° (3.20mn)Contact Fungt-Post0.126° (3.20° C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Series	416		
StyleBoard to BoardNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature55°C ~ 125°C	Connector Type	Socket		
Number of Positions 62 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Rouston Color Black Insulation Color 0.591" (15.00mm) Contact Length - Post 0.126" (3.20mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature55°C ~ 125°C	Number of Positions	62		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature55°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.591" (15.00mm)Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height 0.591" (15.00mm) Contact Length - Post 0.126" (3.20mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	Flash		
Contact Length - Post0.126" (3.20mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.591" (15.00mm)		
	Contact Length - Post	0.126" (3.20mm)		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

416-87-262-41-001101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

416-87-262-41-001101 Payment Methods

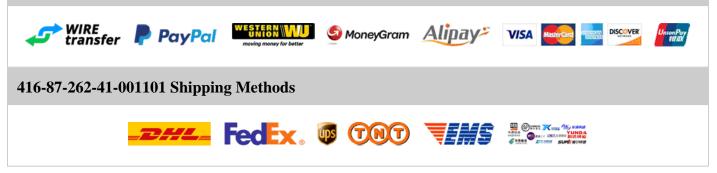

If you have any question about 416-87-262-41-001101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com