

426-83-218-41-001101

426-83-218-41-001101 Information





Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



426-83-218-41-001101 Specifications

| Manufacturer Part Number426-83-218-41-001101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series426Connector TypeSocketContact TypeSocketStyleBoard to BoardNumber of Positions18Number of Rows2Number of Rows1.00° (2.54mm)Number of Rows0.100° (2.54mm)Number of Rows0.100° (2.54mm)Mounting TypeHong HoleYer WapStriever MarkFerninationWire WrapForating TypeOldGoldSocketContact Finish - MatingSoldStrien TypeSoldStrien TypeS | | | | |
|--|-----------------------------------|---|--|--|
| CategoryConnectors, InterconnectsPackage-Series426Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingMinough HoleMounting TypeOnion" (2.54mm)FerminationWire WrapFerminationGoldFortact Finish - MatingSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketStateming TypeSocketSocketSocketStateming TypeSocketSocke | Manufacturer Part Number | 426-83-218-41-001101 | | |
| Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series426Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Manufacturer | Preci-Dip | | |
| Package-Series426Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeQuis PublicFastening TypeGoldContact Finish - Mating9.5µin (0.75µm) | Category | Connectors, Interconnects | | |
| Series426Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeQuick YangFastening TypeGoldContact Finish - Mating29.5µin (0.75µm) | | Rectangular Connectors - Headers, Receptacles, Female Sockets | | |
| Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating9.5 jin (0.75 jum) | Package | - | | |
| Contact TypeFemale SocketStyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - Mating20.5µin (0.75µm) | Series | 426 | | |
| StyleBoard to BoardNumber of Positions18Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldYou fur fur fur fur fur fur fur fur fur fu | Connector Type | Socket | | |
| Number of Positions 18 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Termination Vire Wrap Fastening Type Push-Pull Contact Finish - Mating Gold Yount Finish Thickness - Mating 29.5pin (0.75µm) | Contact Type | Female Socket | | |
| Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldYontart Finish Thickness - Mating29.5µin (0.75µm) | Style | Board to Board | | |
| Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating9.5µin (0.75µm) | Number of Positions | 18 | | |
| Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Number of Positions Loaded | All | | |
| Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldSource Finish Thickness - Mating29.5µin (0.75µm) | Pitch - Mating | 0.100" (2.54mm) | | |
| Mounting TypeThrough HoleTerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Number of Rows | 2 | | |
| TerminationWire WrapFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Row Spacing - Mating | 0.100" (2.54mm) | | |
| Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Mounting Type | Through Hole | | |
| Contact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm) | Termination | Wire Wrap | | |
| Contact Finish Thickness - Mating 29.5µin (0.75µm) | Fastening Type | Push-Pull | | |
| | Contact Finish - Mating | Gold | | |
| | Contact Finish Thickness - Mating | 29.5µin (0.75µm) | | |
| Insulation Color Black | Insulation Color | Black | | |
| Insulation Height 0.425" (10.80mm) | Insulation Height | 0.425" (10.80mm) | | |
| Contact Length - Post 0.126" (3.20mm) | Contact Length - Post | 0.126" (3.20mm) | | |
| Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$ | Operating Temperature | -55°C ~ 125°C | | |
| Material Flammability Rating UL94 V-0 | Material Flammability Rating | UL94 V-0 | | |

| Contact Finish - Post | Tin | | |
|------------------------|-----|--------|---------|
| Mated Stacking Heights | - | | |
| Ingress Protection | - | | |
| Features | - | | |
| | | Report | errors? |

426-83-218-41-001101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

426-83-218-41-001101 Payment Methods

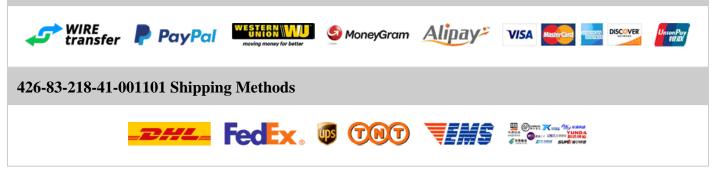

If you have any question about 426-83-218-41-001101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com