


## 4308R-101-220LF

## 4308R-101-220LF Information

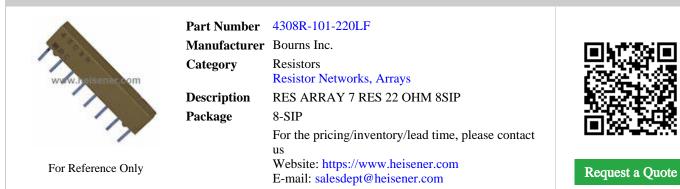

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 4308R-101-220LF Specifications

Manufacturer Part Number4308R-101-220LFManufacturerBourns Inc.CategoryResistorsCategoryResistor Networks, ArraysPackage8-SIPSeries4300RCircuit TypeBussedResistance (Ohms)2Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWOperating Temperature-50°C ~125°CApplications-Applications-Autoning TypeSIPSupplier Device Package8Supplier Device Package8Sip Device Package-Size / Dimension008% W (19.91mm x 2.16mm)Height - Seated (Max)0.15° (4.95mm)		
CategoryResistorsResistor Networks, ArraysPackage8-SIPSeries4300RCircuit TypeBussedResistance (Ohms)22Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWToperature Coefficient±50pm/°COperating Type-55°C ~ 125°CApplications-Nunding TypeSIPSupplier Device Package8-SIPSupplier Device Package6-SIPSize / Dimension0.094" L x 0.085" W (19.91mm x 2.16mm)Height - Seade (Max)0.195" (4.95mm)	Manufacturer Part Number	4308R-101-220LF
Resistor Networks, ArraysPackage8-SIPSeries4300RCircuit TypeBussedResistance (Ohns)22Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWTemperature Coefficient±250ppm°COperating Temperature-55°C ~ 125°CApplications-Nunding TypeThrough HolePackage / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.195" (4.95mm)	Manufacturer	Bourns Inc.
Package8-SIPSeries4300RCircuit TypeBussedResistance (Ohms)22Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWOperating Temperature-55°C ~ 125°COperating Type-55°C ~ 125°CMounting TypeSIPPackage / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Category	Resistors
Series   4300R     Series   4300R     Circuit Type   Bussed     Resistance (Ohms)   22     Tolerance   ±1 Ohm     Number of Resistors   7     Number of Pins   8     Power Per Element   200mW     Operating Temperature   ±250pm/°C     Operating Temperature   -55°C ~ 125°C     Applications   -     Nounting Type   Through Hole     Supplier Device Package   8-SIP     Supplier Device Package   8-SIP     Size / Dimension   0.198" (4.95mm)		Resistor Networks, Arrays
Circuit TypeBussedResistance (Ohms)22Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWTemperature Coefficient±250pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeHnough HolePackage / Case8.SIPSuppler Device Package0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Package	8-SIP
Resistance (Ohms)   22     Tolerance   ±1 Ohm     Number of Resistors   7     Number of Pins   8     Power Per Element   200mW     Temperature Coefficient   ±250ppm/°C     Operating Temperature   -55°C ~ 125°C     Applications   -     Mounting Type   Through Hole     Supplier Device Package   8-SIP     Supplier Device Package   0.784" L x 0.085" W (19.91mm x 2.16mm)     Height - Seated (Max)   0.195" (4.95mm)	Series	4300R
Tolerance±1 OhmNumber of Resistors7Number of Pins8Power Per Element200mWTemperature Coefficient±250pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Circuit Type	Bussed
Number of Resistors7Number of Pins8Power Per Element200mWTemperature Coefficient±250pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Resistance (Ohms)	22
Number of Pins8Power Per Element200mWTemperature Coefficient±250pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Tolerance	±1 Ohm
Power Per Element   200mW     Temperature Coefficient   ±250pm/°C     Operating Temperature   -55°C ~ 125°C     Applications   -     Mounting Type   Fhrough Hole     Package / Case   8-SIP     Supplier Device Package   0.784" L x 0.085" W (19.91mm x 2.16mm)     Height - Seated (Max)   0.195" (4.95mm)	Number of Resistors	7
Temperature Coefficient±250ppm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Number of Pins	8
Operating Temperature -55°C ~ 125°C   Applications -   Mounting Type Through Hole   Package / Case 8-SIP   Supplier Device Package 8-SIP   Size / Dimension 0.784" L x 0.085" W (19.91mm x 2.16mm)   Height - Seated (Max) 0.195" (4.95mm)	Power Per Element	200mW
Applications-Applications-Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Temperature Coefficient	±250ppm/°C
Mounting TypeThrough HolePackage / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Operating Temperature	-55°C ~ 125°C
Package / Case8-SIPSupplier Device Package8-SIPSize / Dimension0.784" L x 0.085" W (19.91mm x 2.16mm)Height - Seated (Max)0.195" (4.95mm)	Applications	-
Supplier Device Package   8-SIP     Size / Dimension   0.784" L x 0.085" W (19.91mm x 2.16mm)     Height - Seated (Max)   0.195" (4.95mm)	Mounting Type	Through Hole
Size / Dimension   0.784" L x 0.085" W (19.91mm x 2.16mm)     Height - Seated (Max)   0.195" (4.95mm)	Package / Case	8-SIP
Height - Seated (Max) 0.195" (4.95mm)	Supplier Device Package	8-SIP
• • • • • • • • • • • • • • • • • • •	Size / Dimension	0.784" L x 0.085" W (19.91mm x 2.16mm)
Report errors?	Height - Seated (Max)	0.195" (4.95mm)
		Report errors?

#### 4308R-101-220LF Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE BUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## 4308R-101-220LF Payment Methods



### 4308R-101-220LF Shipping Methods



If you have any question about 4308R-101-220LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com