


4609X-101-203LF

4609X-101-203LF Information

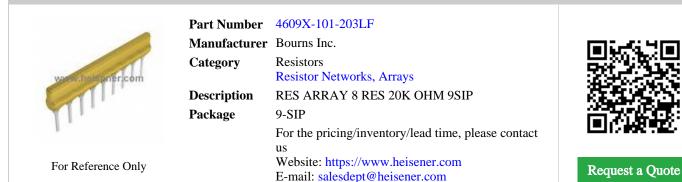

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



4609X-101-203LF Specifications

Manufacturer Part Number4609X-101-203LFManufacturerBourns Inc.CategoryResistorsPackageSelstor Networks, ArraysPackage9SIPSeries4600XCircuit TypeBussedResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWOperating Temperature90mWOperating Temperature±00pm/°CAuplications-Auplications-Supplier Device Package9SIPSupplier Device Package9SIPSiger / Dimension-Supplier Device Package9SIPSiger / Dimension-Siger / Dimension-		
CategoryResistorsResistor Networks, ArraysPackage9-SIPPackage4600XSeries4600XCircuit TypeBusedResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element20mWOperating Temperature400pm/°CApplications-Applications-Applications-Stance / Case9.SIPSupplier Device Package9.SIPSupplier Device Package9.SIPStare / Dissension-Stare / Dissension9.SIPStare / Dissension9.SIPStare / Dissension9.SIPStare / Dissension9.SIPStare / Dissension9.SIPStare / Dissension9.SIPStare / Dissension0.SONS" W (22.81mm x 2.49mm)Stare / Dissension0.200" (5.08mm)	Manufacturer Part Number	4609X-101-203LF
Resistor Networks, ArraysPackage9-SIPSeries4600XCircuit TypeBussedResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100ppm°COperating Temperature55°C ~ 125°CApplications-Nunting TypeThrough HolePackage / Case9-SIPSupplier Device Package9-SIPSize / Dimension0.200" (5.08mm)	Manufacturer	Bourns Inc.
Package9-SIPSeries4600XCircuit TypeBussedResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Pokage / Case9SIPSupplier Device Package9SIPSupplier Device Package0.59°CSize / Dimension0.200" (5.08mm) x 2.49mm)	Category	Resistors
Series 460X Series 60X Circuit Type Bussed Resistance (Ohms) 20k Tolerance ±2% Number of Resistors 8 Number of Resistors 9 Power Per Element 200mW Tolerance ±100pm/°C Operating Temperature -55°C ~ 125°C Applications - Mounting Type Through Hole Supplier Device Package 9-SIP Size / Dimension 0.808" L x 0.098" W (22.81mm x 2.49mm) Height - Seated (Max) 0.200" (5.08mm)		Resistor Networks, Arrays
Circuit TypeBussedResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeFinough HolePackage / Case9SIPSupplier Device Package0.59°C * 12.5°CStep / Dimension0.59NSize / Dimension0.59NSize / Dimension0.59NHeight - Seated (Max)0.200°(5.08mm)	Package	9-SIP
ArrowResistance (Ohms)20kTolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100ppm°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Series	4600X
Tolerance±2%Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package0-SIPSize / Dimension0.200" (5.08mm) x 2.49mm)	Circuit Type	Bussed
Number of Resistors8Number of Pins9Power Per Element200mWTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting Type-1Package / Case9-SIPSupplier Device Package0.59°L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Resistance (Ohms)	20k
Number of Pins9Power Per Element200mWTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Tolerance	±2%
Power Per Element200mWPower Per Element±100pm/°CTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 125°CApplications-Mounting Type-Package / Case9-SIPSupplier Device Package0.898" L x 0.098" W (22.81mm x 2.49mm)Fieght - Seated (Max)0.200" (5.08mm)	Number of Resistors	8
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 125°CApplications-Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package9-SIPSize / Dimension0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Number of Pins	9
Operating Temperature -55°C ~ 125°C Applications - Mounting Type Through Hole Package / Case 9-SIP Supplier Device Package 9-SIP Size / Dimension 0.898" L x 0.098" W (22.81mm x 2.49mm) Height - Seated (Max) 0.200" (5.08mm)	Power Per Element	200mW
Applications-Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package9-SIPSize / Dimension0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Temperature Coefficient	±100ppm/°C
Mounting TypeThrough HolePackage / Case9-SIPSupplier Device Package9-SIPSize / Dimension0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Operating Temperature	-55°C ~ 125°C
Package / Case9-SIPSupplier Device Package9-SIPSize / Dimension0.898" L x 0.098" W (22.81mm x 2.49mm)Height - Seated (Max)0.200" (5.08mm)	Applications	-
Supplier Device Package 9-SIP Size / Dimension 0.898" L x 0.098" W (22.81mm x 2.49mm) Height - Seated (Max) 0.200" (5.08mm)	Mounting Type	Through Hole
Size / Dimension 0.898" L x 0.098" W (22.81mm x 2.49mm) Height - Seated (Max) 0.200" (5.08mm)	Package / Case	9-SIP
Height - Seated (Max) 0.200" (5.08mm)	Supplier Device Package	9-SIP
-	Size / Dimension	0.898" L x 0.098" W (22.81mm x 2.49mm)
Report errors?	Height - Seated (Max)	0.200" (5.08mm)
		Report errors?

4609X-101-203LF Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

4609X-101-203LF Payment Methods



4609X-101-203LF Shipping Methods



If you have any question about 4609X-101-203LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com