

4850.3500

4850.3500 Information

Heisend Biold Write	Part Number Manufacturer Category Description Package	4850.3500 Schurter Inc. Connectors, Interconnects Circular Connectors CONN DIN 5POS FEMALE CBL MNT - For the pricing/inventory/lead time, please contact	
For Reference	e Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



4850.3500 Specifications

Manufacturer Part Number 4850.3500 Manufacturer Schurter Inc. Category Connectors, Interconnects Package - Package 4850.3500 Series 4850.3500 Connector Type Receptacle, Female Sockets Number of Positions 5 Shell Size - Insert Mini DIN Mounting Type Free Hanging (In-Line) Mounting Type Solder Fastening Type Posh-Pull Orientation Keyed Ingress Protection - Shell Material, Finish Polybutylene Terephthalate (PBT) Contact Finish - Yoltage - Rated Strain Relief Voltage - Rated 12VAC/DC Current Rating 2A		
CategoryConnectors, InterconnectsRecupate ConnectorsPackage-Series4850Connector TypeReceptacle, Female SocketsNumber of Positions5Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderGrientationSolderIngress Protection-Shell Material, FinishOlybuylene Terephtalate (PBT)Contact FinishSiderContact FinishSiderSteating Spected-Shell Material, FinishSiderContact FinishStain ReliefStain ReliefStain ReliefStategorgStain ReliefContact FinishStain ReliefStategorgStain ReliefStategorgStain ReliefStain ReliefStain ReliefStategorgStain ReliefStategorgStategorgStategorgStategorgStategorgStategorgStategorgStategorg	Manufacturer Part Number	4850.3500
Icital ConnectorsPackage-Series4850Connector TypeReceptacle, Female SocketsNumber of Positions5Shell Size - InsertMini DINShell Size, MIL-Mouting TypeFee Hanging (In-Line)TerminationSolderFastening TypeOusleOrientationKeyelShell Material, FinishOlybuytene Teephthalate (PBT)Shell Material, Finish-FeaturesStrin ReliefYolage - Rated12VAC/DCCurrent Rating2A	Manufacturer	Schurter Inc.
Package-Series4850Connector TypeReceptacle, Female SocketsNumber of Positions5Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFee Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedShell Material, FinishOlybuytene Terephthalter (PBT)Shell Material, FinishSitar ReliefFeaturesStain ReliefYoltage - RatedJ2VAC/DCCurrent Rating2A	Category	Connectors, Interconnects
Series4850Connector TypeReceptacle, Female SocketsNumber of Positions5Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated2A		Circular Connectors
Connector TypeReceptacle, Female SocketsNumber of Positions5Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientation-Ingress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-Yoltage - RatedStrain ReliefYoltage - Rated2A	Package	-
Number of Positions5Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Trephthalate (PBT)Contact FinishStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Series	4850
Shell Size - InsertMini DINShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrian ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Connector Type	Receptacle, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybuylene Terephthalate (PBT)Contact Finish-FeaturesStrin ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Number of Positions	5
Mounting TypeFree Hanging (In-Line)TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Shell Size - Insert	Mini DIN
TerminationSolderFastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Shell Size, MIL	-
Fastening TypePush-PullOrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Mounting Type	Free Hanging (In-Line)
OrientationKeyedIngress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Termination	Solder
Ingress Protection-Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Fastening Type	Push-Pull
Shell Material, FinishPolybutylene Terephthalate (PBT)Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Orientation	Keyed
Contact Finish-FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Ingress Protection	-
FeaturesStrain ReliefVoltage - Rated12VAC/DCCurrent Rating2A	Shell Material, Finish	Polybutylene Terephthalate (PBT)
Voltage - Rated12VAC/DCCurrent Rating2A	Contact Finish	-
Current Rating 2A	Features	Strain Relief
-	Voltage - Rated	12VAC/DC
Report errors?	Current Rating	2A
		Report errors?

4850.3500 Guarantees

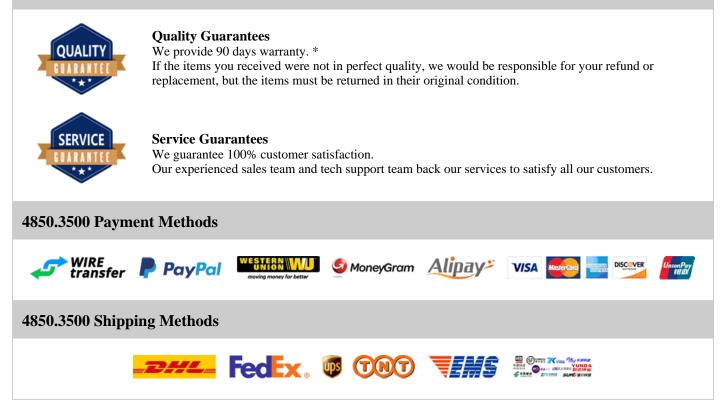

If you have any question about 4850.3500, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com