

## **51002 Information**



Part Number	51002
Manufacturer	Eaton
Category	Circuit Protection Electrical, Specialty Fuses
Description	FUSE LINK T 2A RB 23"
Package	Fuse Link
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **51002 Specifications**

Manufacturer Part Number51002ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageFuse LinkSeries*Fuse Type-Current Rating-Voltage Rating + DC-Kesponse Time-Applications-Class-Approvals-Operating Temperature-Operating Temperature-Mounting Type-Stating Capacity @ Rated Voltage-Approvals-Applications-Approvals-Operating Temperature-Stating Capacity @ Rated Voltage-Nounting Type-Stating Yope-Stating Yope-Stating Yope-Stating Capacity @ Rated Voltage-Stating Yope-Stating Yope- <tr< th=""><th></th><th></th></tr<>		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageFuse LinkSeries*Fuse Type-Current Rating-Voltage Rating - AC-Voltage Rating - DC-Response Time-Applications-Features-Operating Temperature-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkFackage / CaseFuse LinkSize / DimensionSizs" L x 0.748" W(166.00mm x 19.00mm)	Manufacturer Part Number	51002
PackageElectrical, Specialty FusesPackageFuse LinkSeries*Fuse Type-Fuse Type-Current Rating-Voltage Rating - AC-Voltage Rating - DC-Response Time-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting Type-Package / CaseFuse LinkSize / Dimension5355" Lx 0.748" W (166.00mm x 19.00mm)	Manufacturer	Eaton
PackageFuse LinkSeries*Fuse Type-Fuse Type-Current Rating-Voltage Rating - AC-Voltage Rating - DC-Applications-Applications-Features-Class-Approvals-Operating Temperature-Apacking Capacity @ Rated Voltage-Mounting Type-Package / CaseFuse LinkSize / Dimension535" L x 0.748" W(166.00mm x 19.00mm)	Category	Circuit Protection
Series *   Fuse Type -   Fuse Type -   Curren Rating -   Voltage Rating - AC -   Voltage Rating - DC -   Response Time -   Applications -   Features -   Operating Temperature -   Provals -   Operating Type -   Mounting Type -   Package / Case Fuse Link   Ster / Dimension -		Electrical, Specialty Fuses
Fuse Type -   Fuse Type -   Current Rating -   Voltage Rating - AC -   Voltage Rating - DC -   Response Time -   Applications -   Features -   Operating Temperature -   Breaking Capacity @ Rated Voltage -   Mounting Type -   Package / Case Fuse Link   Size / Dimension 6.535" L x 0.748" W(166.00mm x 19.00mm)	Package	Fuse Link
Current Rating-Voltage Rating - AC-Voltage Rating - DC-Response Time-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFines HolePackage / CaseFise LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Series	*
Voltage Rating - AC-Voltage Rating - DC-Response Time-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseSizs" L x 0.748" W(166.00mm x 19.00mm)	Fuse Type	-
Voltage Rating - DC-Response Time-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W(166.00mm x 19.00mm)	Current Rating	-
Response Time-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W(166.00mm x 19.00mm)	Voltage Rating - AC	-
Applications-Applications-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeFuse LinkPackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Voltage Rating - DC	-
Features-Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Response Time	-
Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Applications	-
Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Class	-
Breaking Capacity @ Rated Voltage-Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Approvals	-
Mounting TypeThrough HolePackage / CaseFuse LinkSize / Dimension6.535" L x 0.748" W (166.00mm x 19.00mm)	Operating Temperature	-
Package / Case Fuse Link   Size / Dimension 6.535" L x 0.748" W (166.00mm x 19.00mm)	Breaking Capacity @ Rated Voltage	-
Size / Dimension 6.535" L x 0.748" W (166.00mm x 19.00mm)	Mounting Type	Through Hole
	Package / Case	Fuse Link
Poport of	Size / Dimension	6.535" L x 0.748" W (166.00mm x 19.00mm)
Keport et		Report error

## **51002 Guarantees**

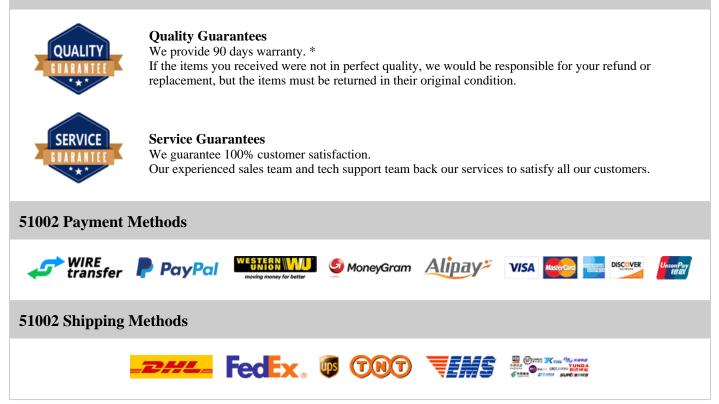

If you have any question about 51002, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com