

51897-008

51897-008 Information

	Constant and the second	 51897-008 Amphenol FCI Connectors, Interconnects Backplane Connectors - Specialized V/T REC POWERBLADE - For the pricing/inventory/lead time, please contact	
	For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



51897-008 Specifications

Manufacturer Part Number51897-008ManufacturerAmphenol FCICategoryConnectors, InterconnectsPackageBackplane Connectors - SpecializedPackage-SeriesPwrBlade?Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Columns-Number of Columns0.100" (2.54mm)TerminationQuick Connect, DisconnectContext Layout, Typical3 PowerContext Layout, TypicalSite Connect, DisconnectContext Layout, TypicalGuide PinContext Layout, TypicalSite Connect, DisconnectContext Layout, TypicalSite Connect, DisconnectConnect Layout, TypicalSite Connect, DisconnectConnect Layout, TypicalSite Connect, DisconnectCo		
CategoryConnectors, InterconnectsBackplane Connectors - SpecializedPackage-SeriesPwrBlade?Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mumber of ColumnsQuick Connect, DisconnectMunting TypeThrough HoleContact Layout, TypicalS PowerFeaturesGuide Pin	Manufacturer Part Number	51897-008
Backplane Connectors - SpecializedPackage-SeriesPwrBlade?Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Columns-Number of ColumnsQuick Connect, DisconnectMounting TypeThrough HoleTerminationQuick Connect, DisconnectFeaturesGuide Pin	Manufacturer	Amphenol FCI
Package-SeriesPwrBlade?Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Columns-Number of Columns1Number of ColumnsQuick Connect, DisconnectMounting TypeThrough HoleFerminationSowerFeaturesGuide Pin	Category	Connectors, Interconnects
SeriesPwrBlade?Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Columns-Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectFeaturesGuide Pin		Backplane Connectors - Specialized
Connector Usage-Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Package	-
Connector TypeReceptacle, Female Blade SocketsConnector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, TypicalSowerFeaturesGuide Pin	Series	PwrBlade?
Connector StyleBlade PowerNumber of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Connector Usage	-
Number of Positions3Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Connector Type	Receptacle, Female Blade Sockets
Number of Positions LoadedAllPitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Connector Style	Blade Power
Pitch0.100" (2.54mm)Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Number of Positions	3
Number of Rows1Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Number of Positions Loaded	All
Number of Columns-Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Pitch	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Number of Rows	1
TerminationQuick Connect, DisconnectContact Layout, Typical3 PowerFeaturesGuide Pin	Number of Columns	-
Contact Layout, Typical3 PowerFeaturesGuide Pin	Mounting Type	Through Hole
Features Guide Pin	Termination	Quick Connect, Disconnect
	Contact Layout, Typical	3 Power
	Features	Guide Pin
Contact Finish Gold of Gold, GX1?	Contact Finish	Gold or Gold, GXT?
Contact Finish Thickness 30µin (0.76µm)	Contact Finish Thickness	30µin (0.76µm)
Color Black	Color	Black
Report erro		Report errors?

51897-008 Guarantees

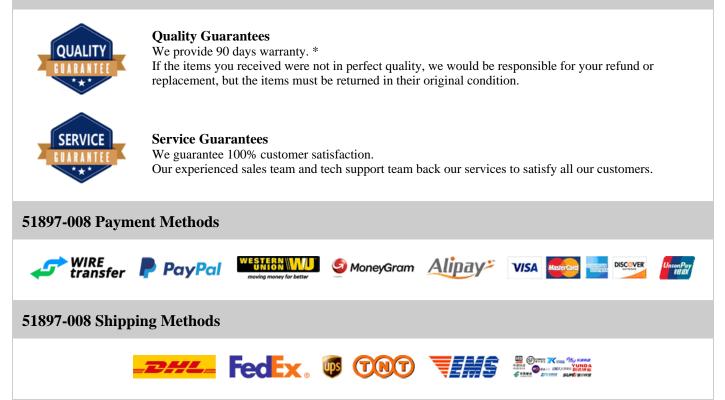

If you have any question about 51897-008, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com