

55508-046LF

uest a Quote

55508-046LF Information

Contail service stants they	Part Number	55508-046LF	
	Manufacturer	Amphenol FCI	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 46POS SMD GOLD	
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



55508-046LF Specifications

Manufacturer Part Number55508-046LFManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-Package-SeriesMinitek?Connector TypeReceptacles, Female SocketsContact TypeFemale SocketSyleBoard to BoardNumber of Positions46Number of Rows2Number of Rows0.079°(2.00mm)Number of Rows0.019°(2.00mm)Number of RowsSocketFerninationSolderFortininationSolderFortininationSolderFortininationSolderFortininininini TypeSolderFortini Thickness - MatingInfunctionInsulation ColorBlack			
CategoryCancectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketSyleBoard to BoardNumber of Positions46Number of Positions LoadedN07" (2.00mm)Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSufface MountMounting TypeSolderFreminationSolderFornitationGoldContact Finish - Mating1.91µin (0.05µm)	Manufacturer Part Number	55508-046LF	
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thitckness - Mating1.97µin (0.05µm)	Manufacturer	Amphenol FCI	
Package-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSulderFastening TypeOslderContact Finish - Mating1.97µin (0.05µm)	Category	Connectors, Interconnects	
SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderFastening TypeGoldContact Finish - Mating1.97µin (0.05µm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - Mating1.91µin (0.05µm)	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderFastening TypePush-PullContact Finish - Mating1.97µin (0.05µm)	Series	Minitek?	
StyleBoard to BoardNumber of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderFastening TypePush-PullContact Finish - Mating0.97µ (0.05µm)	Connector Type	Receptacle	
Number of Positions46Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIontact Finish Thickness - Mating1.97µin (0.05µm)	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldYour Contact Finish - Mating1.97µin (0.05µm)	Style	Board to Board	
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish - Mating1.97µin (0.05µm)	Number of Positions	46	
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1.97µin (0.05µm)	Number of Positions Loaded	All	
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1.97µin (0.05µm)	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1.97μin (0.05μm)	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1.97µin (0.05µm)	Row Spacing - Mating	0.079" (2.00mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating1.97µin (0.05µm)	Mounting Type	Surface Mount	
Contact Finish - MatingGoldContact Finish Thickness - Mating1.97µin (0.05µm)	Termination	Solder	
Contact Finish Thickness - Mating 1.97µin (0.05µm)	Fastening Type	Push-Pull	
	Contact Finish - Mating	Gold	
Insulation Color Black	Contact Finish Thickness - Mating	1.97µin (0.05µm)	
	Insulation Color	Black	
Insulation Height 0.091" (2.30mm)	Insulation Height	0.091" (2.30mm)	
Contact Length - Post -	Contact Length - Post	-	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

55508-046LF Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

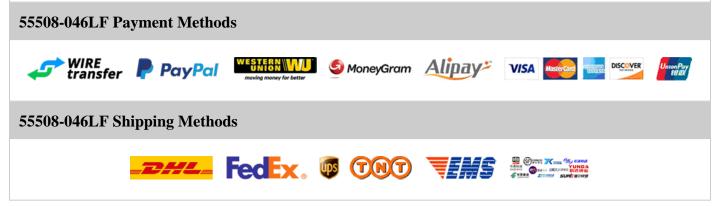

If you have any question about 55508-046LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com