

55510-324

st a Quote

55510-324 Information

Heisener.com	Part Number	55510-324	
	Manufacturer	Amphenol FCI	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 24POS SMD GOLD	- <u>675</u>
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
Tor Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Reques

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



55510-324 Specifications

Manufacturer Part Number55510-324ManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleConnector TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSurface MountMounting TypeSurface MountFerminationSolderFastening TypeGold
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions Loaded0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-Pull
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSurface MountMounting TypeSurface MountFerminationSolderFastening TypePush-Pull
Package-SeriesMintek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypePush-Pull
SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypePush-Pull
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
StyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Number of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Mounting TypeSurface MountTerminationSolderFastening TypePush-Pull
Termination Solder Fastening Type Push-Pull
Fastening Type Push-Pull
Contact Einich Mating Cold
Contact Finish - Mating Gold
Contact Finish Thickness - Mating 15µin (0.38µm)
Insulation Color Black
Insulation Height 0.177" (4.50mm)
Contact Length - Post -
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$
Material Flammability Rating UL94 V-0

Contact Finish - Post	Tin-Lead
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

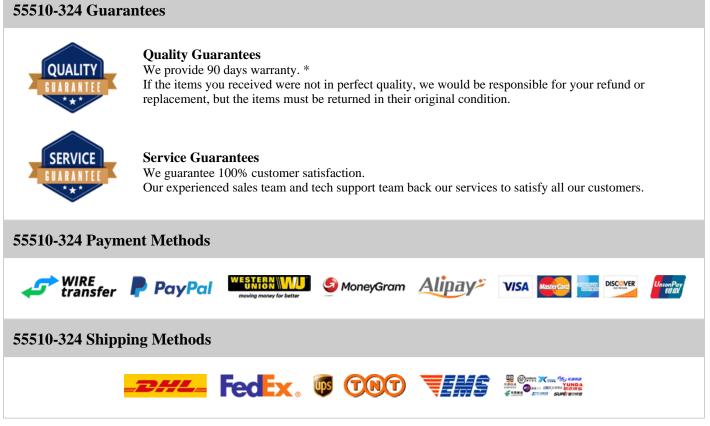

If you have any question about 55510-324, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com