

56ET Information



For Reference Only

Part Number	56ET	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CARTRIDGE 56A 690VAC/500VDC	
Package	Cylindrical, Blade Terminal (Bolt)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



56ET Specifications

Manufacturer Part Number 56ET Manufacturer Eaton Category Circuit Protection Electrical, Specialty Fuses Electrical, Specialty Fuses Package Cylindrical, Blade Terminal (Bolt) Series ET Fuse Type Catridge Current Rating 56A Voltage Rating - AC 690V Voltage Rating - DC 500V Response Time - Applications Electrical, Industrial Factures - Operating Temperature - Approvals CE, UR Mounting Type Bolt Mount Package / Case Cylindrical, Blade Terminal (Bolt)		
CategoryCircui ProtectionRecarcelElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesETFuse TypeCatridgeFuse TypeCatridgeCurrent RatingS6AVoltage Rating - AC690VVoltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-ApprovalsCE, UROperating TemperatureS00KAPreaking Capacity @ Rated VoltageCE, URAunting TypeBolt MountMounting TypeSolt MountFackage / CaseCylindrical, Blade Terminal (Bolt)Size / DimensionSci7" Diax 1.890" L(17.10mm x 48.00mm)	Manufacturer Part Number	56ET
PackageElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Bolt)SeriesETFuse TypeCartridgeCurrent Rating56AVoltage Rating - AC690VVoltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-Operating Temperature-Operating Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Bolt)SeriesETFuse TypeCartridgeFuse TypeCartridgeCurrent Rating56AVoltage Rating - AC690VVoltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsEle UROperating Temperature-Preaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Category	Circuit Protection
<table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container>		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse Type64Current Rating690VVoltage Rating - AC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsEle UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Package	Cylindrical, Blade Terminal (Bolt)
Current Rating56AVoltage Rating - AC690VVoltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated VoltageBolt MountMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Series	ET
Voltage Rating - AC690VVoltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated VoltageBolt MountMounting TypeBolt MountPackage / CaseCY indical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Fuse Type	Cartridge
Voltage Rating - DC500VResponse Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCijindrical, Blade Terminal (Bolt)Size / Dimension0673" Dia x 1.890" L (17.10mm x 48.00mm)	Current Rating	56A
Response Time-ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Voltage Rating - AC	690V
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Voltage Rating - DC	500V
Features-Features-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Response Time	-
Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical Bolta Cerninal (Bolt)Size / Dimension0673" Dia x 1.890" L (17.10mm x 48.00mm)	Applications	Electrical, Industrial
ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Class	-
Breaking Capacity @ Rated Voltage200kAMounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Approvals	CE, UR
Mounting TypeBolt MountPackage / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Bolt)Size / Dimension0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Breaking Capacity @ Rated Voltage	200kA
Size / Dimension 0.673" Dia x 1.890" L (17.10mm x 48.00mm)	Mounting Type	Bolt Mount
	Package / Case	Cylindrical, Blade Terminal (Bolt)
Report errors?	Size / Dimension	0.673" Dia x 1.890" L (17.10mm x 48.00mm)
		Report errors?

56ET Guarantees

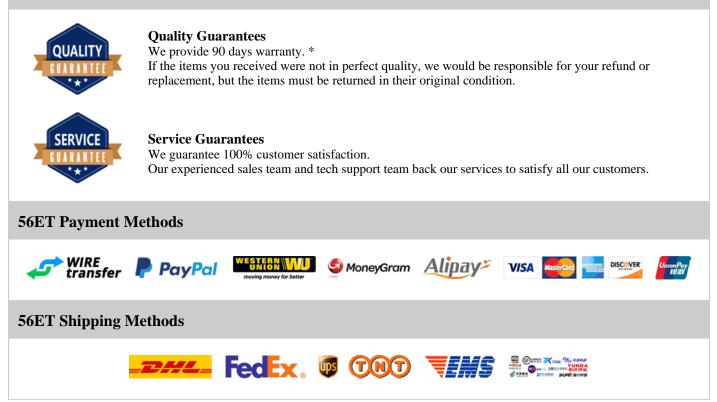

If you have any question about 56ET, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com