


5AK2R0CDAAI

Request a Quote

5AK2R0CDAAI Information

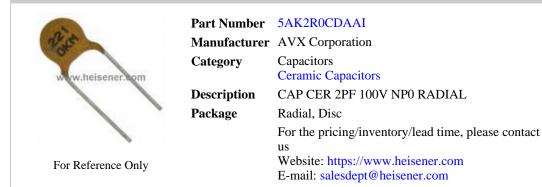

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



5AK2R0CDAAI Specifications

Manufacturer Part Number 54K2R0CDAAI Manufacturer AVX Corporation Category Capacitors Package Radial, Disc Package Radial, Disc Series - Capacitors 2pF Tolerance 40.25pF Voltage - Rated 100V Operating Temperature Coefficient COG, NP0° Operating Temperature - Applications General Purpose Faitures - Applications General Purpose Faiture Rate - Mounting Type Matial, Disc Size / Dimension 0.157" Dia (4.00mm) Height - Seated (Max) 0.118" (3.00mm) Thickness (Max) - Lead Spacing Mongent Case Lead Spacing Mongent Case Lead Spacing Mongent Case Lead Spacing Stringth	-	
Actegory Capacitors Package Radial, Disc Series Radial, Disc Capacitance 2pF Colegacitance 2pSpF Voltage - Rated 100V Tolerance 000, NPO Tolerance 30°C ~ 85°C Operating Temperature Coefficient - Applications - Ratings - Applications General Purpose Failure Rate - Mounting Type - Package / Case Radial, Disc Size / Dimension 0.18° (3.00mm) Height - Seated (Max) - Thickness (Max) 0.098° (2.50mm) Lead Spacing Size / Size)	Manufacturer Part Number	5AK2R0CDAAI
Indext Ceramic CapacitorsPackageRadial, DiscSeries-Capacitance2pFTolerance±0.25pFVoltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.118" (3.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadial, DiscSeries-Capacitance2pFTolerance40.25pFVoltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-Series-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting Type-Package / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Category	Capacitors
Series-Capacitance2pFTolerance±0.25pFVoltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight		Ceramic Capacitors
Capacitance2pFTolerance±0.25pFVoltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMaila, DiscSize / Dimension0.157° Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.998° (2.50mm)Lead StyleStraight	Package	Radial, Disc
Tolerance±0.25pFVoltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.118" (3.00mm)Height - Seated (Max)-Thickness (Max)0.998" (2.50mm)Lead SpacingStraight	Series	-
Voltage - Rated IOV Temperature Coefficient COG, NPO Operating Temperature -30°C ~ 85°C Features - Ratings - Applications General Purpose Faiture Rate - Mounting Type - Package / Case Radial, Disc Size / Dimension 0.157" Dia (4.00mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.098" (2.50mm) Lead Style Straight	Capacitance	2pF
Temperature CoefficientC0G, NPOOperating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Tolerance	±0.25pF
Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Voltage - Rated	100V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Operating Temperature	-30°C ~ 85°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Failure Rate	-
Size / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Mounting Type	Through Hole
Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Package / Case	Radial, Disc
Thickness (Max)-Lead Spacing0.098" (2.50mm)Lead StyleStraight	Size / Dimension	0.157" Dia (4.00mm)
Lead Spacing0.098" (2.50mm)Lead StyleStraight	Height - Seated (Max)	0.118" (3.00mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.098" (2.50mm)
Report errors?	Lead Style	Straight
		Report errors?

5AK2R0CDAAI Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE UARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

5AK2R0CDAAI Payment Methods



5AK2R0CDAAI Shipping Methods



If you have any question about 5AK2R0CDAAI, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com