


# 5GK220JAAAA

**Request a Quote** 

### **5GK220JAAAA Information**

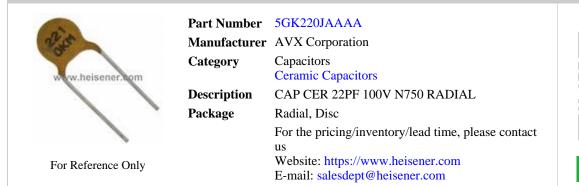

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **5GK220JAAAA Specifications**

Manufacturer Part NumberSGK220JAAAAManufacturer Art NumberAVX CorporationCategoryCapacitorsCategoryCaranic CapacitorsPackageRadial, DiscSeries-Capacitance22pFTolerance5% SVoltage - Rated100VTomperature CoefficientN750Oparating Temperature-Safus-ApplicationsGeneral PurposeFaitures-Kaing-ApplicationsGeneral PurposeFailure Rate-Notang TypeMational DiscSafe/ CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead SpacingSiraightLead SpacingSiraight		
CategoryCapacitorsPackageRadial, DiscSeries-Capacitance22pFTolerance22pFVoltage - Rated100VTomperature CoefficientN750Operating Temperature-Series-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting Type-Package / CaseRadial, DiscSize / Dimension1015" Dia (4.00mm)Fickers (Max)-Fickers (Max)-Fickers (Max)-Size / Dimension0.118" (3.00mm)Fickers (Max)-Fickers (Max)- <td>Manufacturer Part Number</td> <td>5GK220JAAAA</td>	Manufacturer Part Number	5GK220JAAAA
Indext Ceramic CapacitorsPackageRadial, DiscSeries-Capacitance22pFTolerance±5%Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.118° (3.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadial, DiscSeries-Capacitance22pFTolerance±5%Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Category	Capacitors
Series.Capacitance22pFTolerance±5%Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HoleSize / Dimension.118° (3.00mm)Height - Seated (Max).Thickness (Max).Lead Spacing.197° (5.00mm)Lead StyleStraight		Ceramic Capacitors
Capacitance22pFTolerance±5%Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMing HoleSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)0.197" (5.00mm)Lead SpacingStraightLead StyleStraight	Package	Radial, Disc
Tolerance±5%Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.118" (3.00mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingDingr" (5.00mm)Lead StyleStraight	Series	-
Voltage - Rated100VTemperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMillosPackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)0.197" (5.00mm)Lead SpacingStraight	Capacitance	22pF
Temperature CoefficientN750Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Tolerance	±5%
Operating Temperature-30°C ~ 85°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Voltage - Rated	100V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Temperature Coefficient	N750
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Operating Temperature	-30°C ~ 85°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadial, DiscSize / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Failure Rate	-
Size / Dimension0.157" Dia (4.00mm)Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Mounting Type	Through Hole
Height - Seated (Max)0.118" (3.00mm)Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Package / Case	Radial, Disc
Thickness (Max)-Lead Spacing0.197" (5.00mm)Lead StyleStraight	Size / Dimension	0.157" Dia (4.00mm)
Lead Spacing0.197" (5.00mm)Lead StyleStraight	Height - Seated (Max)	0.118" (3.00mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.197" (5.00mm)
Report errors?	Lead Style	Straight
		Report errors?

#### **5GK220JAAAA Guarantees**



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE SUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### **5GK220JAAAA Payment Methods**



# 5GK220JAAAA Shipping Methods



If you have any question about 5GK220JAAAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com