

6015-016

6015-016 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



6015-016 Specifications

| Manufacturer Part Number6015-016ManufacturerAPI Delevan Inc.CategoryTransformersPower TransformersPower TransformersPackage-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 8V, Series 16VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm Lx 39.67mm WHeight - Seated (Max)SooVrmsWoltage - IsolationSooVrmsWeightOnto Transport | | |
|--|---------------------------------|-----------------------------|
| Category Transformers Category Fransformers Power Transformers Power Transformers Package - Series 6015 Type Laminated Core Voltage - Primary 115V Voltage - Secondary (Full Load) Parallel 8V, Series 16V Current - Output (Max) Parallel 1.6A, Series 800mA Primary Winding(s) Single Secondary Winding(s) Dual Center Tap No Power - Max 12 VA Mounting Type PC Pin Size / Dimension 9C Pin Size / Dimension 36.50mm Voltage - Isolation S00Vrms Weight Size / Dimension | Manufacturer Part Number | 6015-016 |
| Power TransformersPackage-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 8V, Series 16VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)500VrmsVoltage - Isolation500VrmsWeight0.7 lb (317.51g) | Manufacturer | API Delevan Inc. |
| Package-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 1.6A, Series 800mACurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / Dimension9C PinSize / Dimension36.50mmHeight - Seated (Max)500VrmsWeight500Vrms | Category | Transformers |
| Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 8V, Series 16VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension36.50mmHeight - Seated (Max)36.00mmWoitge - Isolation2500VrmsWeight0.7 lb (317.51g) | | Power Transformers |
| TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 8V, Series 16VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension36.50mmHeight - Seated (Max)2500VrmsWeight0.7 Ib (317.51g) | Package | - |
| Yoltage - Primary Instrumentation Voltage - Secondary (Full Load) Parallel 8V, Series 16V Current - Output (Max) Parallel 1.6A, Series 800mA Primary Winding(s) Single Secondary Winding(s) Dual Center Tap No Power - Max 12 VA Mounting Type Through Hole Size / Dimension PC Pin Size / Dimension 36.50mm Height - Seated (Max) 36.50mm Voltage - Isolation 2500Vrms | Series | 6015 |
| Voltage - Secondary (Full Load)Parallel 8V, Series 16VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Туре | Laminated Core |
| Current - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension36.50mm WHeight - Seated (Max)SicoVrmsVoltage - Isolation500VrmsWeight0.7 lb (317.51g) | Voltage - Primary | 115V |
| Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)ScolowrmsVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Voltage - Secondary (Full Load) | Parallel 8V, Series 16V |
| Secondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Current - Output (Max) | Parallel 1.6A, Series 800mA |
| Center TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Primary Winding(s) | Single |
| Power - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Secondary Winding(s) | Dual |
| Mounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Center Tap | No |
| Termination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Power - Max | 12 VA |
| Size / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Mounting Type | Through Hole |
| Height - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Termination Style | PC Pin |
| Voltage - Isolation2500VrmsWeight0.7 lb (317.51g) | Size / Dimension | 47.63mm L x 39.67mm W |
| Weight 0.7 lb (317.51g) | Height - Seated (Max) | 36.50mm |
| - | Voltage - Isolation | 2500Vrms |
| Report errors? | Weight | 0.7 lb (317.51g) |
| | | Report errors? |

6015-016 Guarantees

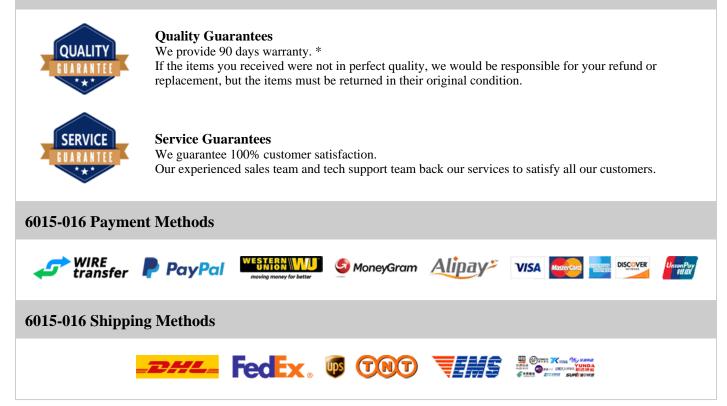

If you have any question about 6015-016, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com