

# 6015-120

### 6015-120 Information



### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 6015-120 Specifications

ManufacturerAPI Delevan Inc.CategoryTransformersPackage-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypePrinagheneSingle Additional StateSinglePower - Max12 VAMounting TypePrinagheneSingle Additional StateSinglePower - Max12 VAMounting TypeSingle Additional StateSingle Additional StateSingleMounting TypeSingle Additional StateMounting TypeSingle Additional StateMounting TypeSingle Additional StateSingle Additional StateSingle Additional StateMounting TypeSingle Additional StateMounting TypeSingle Additional StateMounting TypeSingle Additional StateSingle Additional StateSingle Additional StateMoting State (Max)Single Additional StateMoting Fuel State (Max)Single Additional StateMoting Fuel State (Max)Single		
CategoryTransformersPower TransformersPackage-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / Dimension9C PinSize / Dimension36.50mmHeight - Seated (Max)200VrmsWoight0.1 b(317.51g)	Manufacturer Part Number	6015-120
Power TransformersPackage-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)S00VrmsVoltage - Isolation500VrmsWeight0.7 Ib (317.51g)	Manufacturer	API Delevan Inc.
Package-Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StyleSP PinSize / Dimension47.63mm Lx 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation500VrmsWeight0.7 Ib (317.51g)	Category	Transformers
Series6015TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmWotage - Isolation200VrmsWeight0.7 lb (317.51g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StyleQC PinSize / Dimension36.50mm L x 39.67mm WHeight - Seated (Max)SizoVrmsWottge - Isolation500VrmsWeight0.7 Ib (31.51g)	Package	-
Yoltage - Primary115VVoltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension36.50mmHeight - Seated (Max)36.00VrmsWoitge - Isolation0.7 Ib (317.51g)	Series	6015
Voltage - Secondary (Full Load)Parallel 60V, Series 120VCurrent - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)S6.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Туре	Laminated Core
Current - Output (Max)Parallel 200mA, Series 100mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)SicoVrmsVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)ScolowrmsVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Voltage - Secondary (Full Load)	Parallel 60V, Series 120V
Secondary Winding(s)DualCenter TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Current - Output (Max)	Parallel 200mA, Series 100mA
Center TapNoPower - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Primary Winding(s)	Single
Power - Max12 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Center Tap	No
Termination StylePC PinSize / Dimension47.63mm L x 39.67mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Power - Max	12 VA
Size / Dimension 47.63mm L x 39.67mm W   Height - Seated (Max) 36.50mm   Voltage - Isolation 2500Vrms   Weight 0.7 lb (317.51g)	Mounting Type	Through Hole
Height - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.7 lb (317.51g)	Size / Dimension	47.63mm L x 39.67mm W
Weight     0.7 lb (317.51g)	Height - Seated (Max)	36.50mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.7 lb (317.51g)
1 op of the office of the offi		Report errors?

#### 6015-120 Guarantees

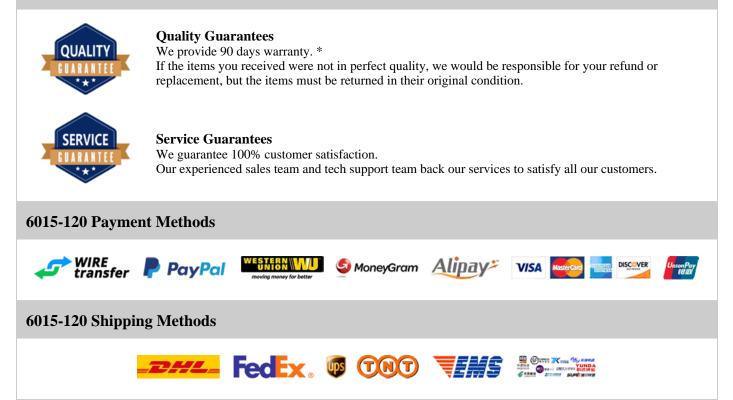

If you have any question about 6015-120, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com