

# 6016-024

#### 6016-024 Information



### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 6016-024 Specifications

Manufacturer Part Number 6016-024   Manufacturer API Delevan Inc.   Category Transformers   Package -   Package 6016   Stries 6016   Type Laminated Core   Voltage - Primary 115V   Voltage - Secondary (Full Load) Parallel 12V, Series 24V   Current - Output (Max) Parallel 1.6A, Series 800mA   Primary Winding(s) Single   Secondary Winding(s) Dual   Power - Max 20 VA   Mounting Type Through Hole   Yoltage - Isolation Scondary Winding(s)   Secondary Winding(s) Single   Youter - Max 20 VA   Youting Type Single   Youting Type Through Hole   Youting Type Single   Youting Type Single   Youting Style Single   Youting Type Single   Youting Type Single   Youting Type Single   Youting Type Single   Yo		
Category Transformers   Package Power Transformers   Package -   Series 6016   Type Laminated Core   Voltage - Primary 115V   Voltage - Secondary (Full Load) Parallel 12V, Series 24V   Current - Output (Max) Parallel 1.6A, Series 800mA   Primary Winding(s) Single   Secondary Winding(s) Dual   Power - Max 0VA   Nouting Type Prinorgh Hole   Ster / Parallel Secondary Winding (Secondary Winding Secondary Materiated Secondary Se	Manufacturer Part Number	6016-024
InterformersPackage-Series6016TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)3600rmsVoltage - Isolation500VrmsWeight0.8 lb (362.87g)	Manufacturer	API Delevan Inc.
Package-Series6016TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 1.6A, Series 800mACurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleSize / DimensionSr.15mm L x 47.63mm WSize / Dimension36.50mmVoltage - IsolationSizol YmssWeightSuntWeightSize / Size /	Category	Transformers
Series6016TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StyleS7.15mm L x 47.63mm WSize / Dimension36.50mmVoltage - IsolationS00VrmsWeight0.8 lb (362.87g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StyleScingleSize / Dimension57.15mm Lx 47.63mm WHeight - Seated (Max)36.50mmVoltage - IsolationStol VrmsWeight0.8 lb (362.87g)	Package	-
Number Number   Voltage - Primary 115V   Voltage - Secondary (Full Load) Parallel 12V, Series 24V   Current - Output (Max) Parallel 1.6A, Series 800mA   Primary Winding(s) Single   Secondary Winding(s) Dual   Center Tap No   Power - Max 20 VA   Mounting Type Through Hole   Termination Style Sr.15mm L x 47.63mm W   Size / Dimension 36.50mm   Voltage - Isolation StoVrms   Woltage - Isolation StoVrms	Series	6016
Voltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Туре	Laminated Core
Current - Output (Max)Parallel 1.6A, Series 800mAPrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Voltage - Secondary (Full Load)	Parallel 12V, Series 24V
Secondary Winding(s)DualCenter TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Current - Output (Max)	Parallel 1.6A, Series 800mA
Center TapNoPower - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Primary Winding(s)	Single
Power - Max20 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Center Tap	No
Termination StylePC PinSize / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Power - Max	20 VA
Size / Dimension57.15mm L x 47.63mm WHeight - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Mounting Type	Through Hole
Height - Seated (Max)36.50mmVoltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.8 lb (362.87g)	Size / Dimension	57.15mm L x 47.63mm W
Weight 0.8 lb (362.87g)	Height - Seated (Max)	36.50mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.8 lb (362.87g)
		Report errors?

#### 6016-024 Guarantees

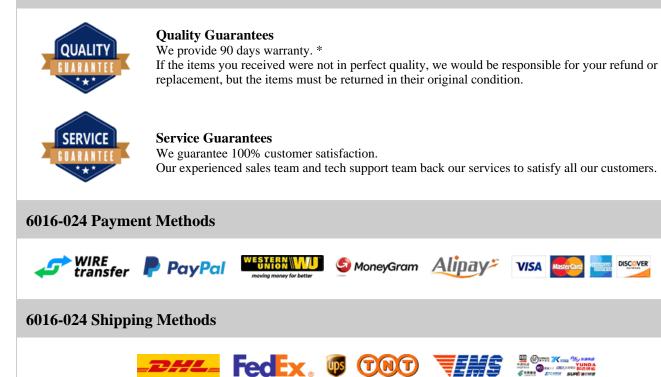

If you have any question about 6016-024, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com