

# 6017-024

### 6017-024 Information



### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 6017-024 Specifications

Manufacturer Part Number6017-024ManufacturerAPI Delevan Inc.CategoryTransformersPackage-Package-Series6017TypeLaminated CoreVoltage - Primary15VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)SingleSecondary Winding(s)SingleSecondary Winding(s)SinglePower - Max36 VAMounting TypeThrough HoleSteir / Dimension6.68mm L x 55.55mm WSize / Dimension39.67mmVoltage - Isolation300VrmsWeight11bs (499g)	-	
CategoryTransformersPower TransformersPackage-Series6017TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualPower - Max60 YAPower - MaxSinglePounting TypeProng HolePrimation StyleProng HoleSize / Dimension66.8mm Lx 55.5mm WAHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 bs (499g)	Manufacturer Part Number	6017-024
Power TransformersPackage-Series6017TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination Style66.68mm L x 55.55mm WSize / Dimension30.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Manufacturer	API Delevan Inc.
Package-Series6017TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleStez / Dimension66.8mm L x 55.55mm WHeight - Seated (Max)39.07mmWeight11bs (499g)	Category	Transformers
Series6017TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmWoitge - Isolation2500VrmsWeight1.1 lbs (499g)		Power Transformers
TypeLaminated CoreVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypePrinough HoleTermination Style66.68mm L x 55.55mm WSize / Dimension39.67mmHeight - Seated (Max)39.07mmsWeight1.1 lbs (499g)	Package	-
SystemInterferenceVoltage - Primary115VVoltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination Style66.68mm L x 55.55mm WSize / Dimension39.67mmHeight - Seated (Max)39.07mmsVoltage - Isolation1.1 lbs (499g)	Series	6017
Voltage - Secondary (Full Load)Parallel 12V, Series 24VCurrent - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Туре	Laminated Core
Current - Output (Max)Parallel 3A, Series 1.5APrimary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation1.1 lbs (499g)	Voltage - Primary	115V
Primary Winding(s)SingleSecondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Voltage - Secondary (Full Load)	Parallel 12V, Series 24V
Secondary Winding(s)DualCenter TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation500VrmsWeight1.1 lbs (499g)	Current - Output (Max)	Parallel 3A, Series 1.5A
Center TapNoPower - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Primary Winding(s)	Single
Power - Max36 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Center Tap	No
Termination StylePC PinSize / Dimension66.68mm L x 55.55mm WHeight - Seated (Max)39.67mmVoltage - Isolation2500VrmsWeight1.1 lbs (499g)	Power - Max	36 VA
Size / Dimension   66.68mm L x 55.55mm W     Height - Seated (Max)   39.67mm     Voltage - Isolation   2500Vrms     Weight   1.1 lbs (499g)	Mounting Type	Through Hole
Height - Seated (Max) 39.67mm   Voltage - Isolation 2500Vrms   Weight 1.1 lbs (499g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight1.1 lbs (499g)	Size / Dimension	66.68mm L x 55.55mm W
Weight 1.1 lbs (499g)	Height - Seated (Max)	39.67mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	1.1 lbs (499g)
		Report errors?

#### 6017-024 Guarantees

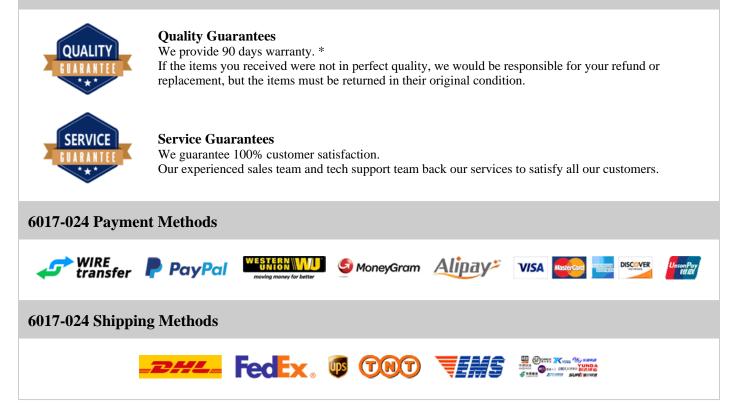

If you have any question about 6017-024, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com