

# 6024-048

#### 6024-048 Information

Heisener.com	Part Number Manufacturer Category Description Package	6024-048 API Delevan Inc. Transformers Power Transformers XFRMR LAMINATED 6VA THRU HOLE - For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 6024-048 Specifications

ManufacturerAPI Delevan Inc.CategoryTransformersPower TransformersPower TransformersPackage-Series6024TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WVoltage - Isolation33.32mm		
CategoryTransformersPower TransformersPackage-Series6024TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleSize / Dimension41.28mm Lx 33.32mm WHeight - Seated (Max)33.02mmWoltage - Isolation500VrmsWeight0.44 lb (199.58g)	Manufacturer Part Number	6024-048
PackagePower TransformersPackage-Series6024TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.2mmWeight0.44 lb (199.58g)	Manufacturer	API Delevan Inc.
Package-Series6024TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCurter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension3.32mm Lx 33.32mm WVoltage - Isolation2500VrmsWeight0.441 b(199.58g)	Category	Transformers
Series6024TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmWeight0.44 lb (199.58g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)2500VrmsWeight0.44 lb (199.58g)	Package	-
Voltage - PrimaryInformation of the second and the secon	Series	6024
Voltage - Secondary (Full Load)Parallel 24V, Series 48VCurrent - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.00VrmsWeight0.44 lb (199.58g)	Туре	Laminated Core
Current - Output (Max)Parallel 250mA, Series 125mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation500VrmsWeight0.44 lb (199.58g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Voltage - Secondary (Full Load)	Parallel 24V, Series 48V
Secondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Current - Output (Max)	Parallel 250mA, Series 125mA
Center TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Primary Winding(s)	Dual
Power - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Center Tap	No
Termination StylePC PinSize / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Power - Max	6 VA
Size / Dimension41.28mm L x 33.32mm WHeight - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Mounting Type	Through Hole
Height - Seated (Max)33.32mmVoltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Termination Style	PC Pin
Voltage - Isolation2500VrmsWeight0.44 lb (199.58g)	Size / Dimension	41.28mm L x 33.32mm W
Weight 0.44 lb (199.58g)	Height - Seated (Max)	33.32mm
	Voltage - Isolation	2500Vrms
Report errors?	Weight	0.44 lb (199.58g)
		Report errors?

#### 6024-048 Guarantees

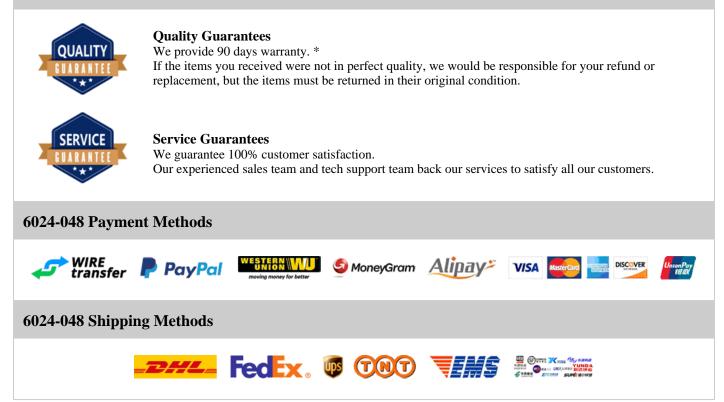

If you have any question about 6024-048, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com