

6052-012

6052-012 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



6052-012 Specifications

Manufacturer Part Number6052-012ManufacturerAPI Delevan Inc.CategoryTransformersPackage-Series6052TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMonting TypeThrough HoleTermination StyleSecondarukSize / Dimension34.93mm Lx 28.58mm WViltage - Isolation1500VrmsWeightBio Wang Bio (Baccing)		
CategoryTransformersPower TransformersPackage-Series6052TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoNower - Max6 VAMouning TypeThrough HoleSize / Dimension92.9Size / Dimension3.80mmHeight - Seated (Max)500VrmsWeight0.438 b (198.67g)	Manufacturer Part Number	6052-012
Final Power TransformersPackage-Series6052TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Manufacturer	API Delevan Inc.
Package.Series6052TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsWeight0.438 lb (198.67g)	Category	Transformers
Series6052TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StyleSecondary Winding(s)Size / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsWeight0.438 lb (198.67g)		Power Transformers
TypeLaminated CoreVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style34.93mm L x 28.58mm WSize / Dimension33.00mmHeight - Seated (Max)500VrmsWotage - Isolation1500Vrms	Package	-
NoteInterferenceVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500Vrms	Series	6052
Voltage - Secondary (Full Load)Parallel 6.3V, Series 12.6VCurrent - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination Style9C PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Туре	Laminated Core
Current - Output (Max)Parallel 900mA, Series 450mAPrimary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)500VrmsVoltage - Isolation1500Vrms	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)S00VrmsVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Voltage - Secondary (Full Load)	Parallel 6.3V, Series 12.6V
Secondary Winding(s)DualCenter TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Current - Output (Max)	Parallel 900mA, Series 450mA
Center TapNoPower - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Primary Winding(s)	Dual
Power - Max6 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Secondary Winding(s)	Dual
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Center Tap	No
Termination StylePC PinSize / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Power - Max	6 VA
Size / Dimension34.93mm L x 28.58mm WHeight - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Mounting Type	Through Hole
Height - Seated (Max)23.80mmVoltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Termination Style	PC Pin
Voltage - Isolation1500VrmsWeight0.438 lb (198.67g)	Size / Dimension	34.93mm L x 28.58mm W
Weight 0.438 lb (198.67g)	Height - Seated (Max)	23.80mm
	Voltage - Isolation	1500Vrms
	Weight	0.438 lb (198.67g)
Report errors?		Report errors?

6052-012 Guarantees

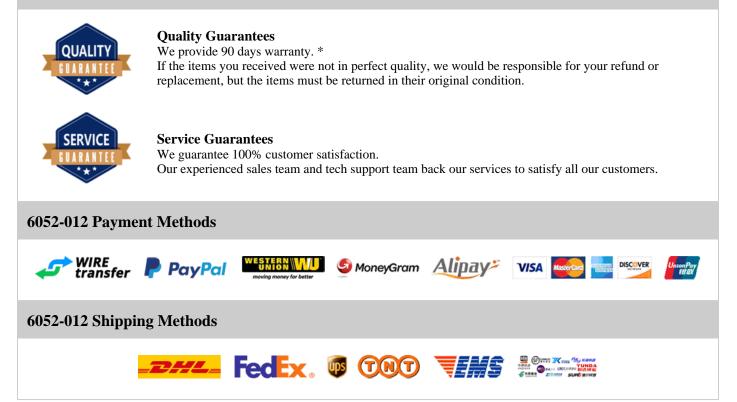

If you have any question about 6052-012, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com