

62031

62031 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



62031 Specifications

Manufacturer Part Number62031ManufacturerTalema Group LLCCategoryTransformersPackage-Package-SeriesStandard MiniTypeToroidalVoltage - PrimaryI15V, 230VVoltage - Scondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)Single, Multiple TapsPower - Max7 VAPower - MaxVire LeadsSize / Dimension-Stack (Max)-Size / Dimension-Wire Leads-Wire Leads-Wire Loads-Wire Loads-Size / Dimension-Size / Dimension-Wire Loads-Wire Loads-Wire Loads-Size / Dimension-Size / Dimension-Wire Loads-Wire Loads-Wire Loads-Size / Dimension-Wire Loads-Wire Loads		
CategoryTransformersPackage-SeriesStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCurter TapNoPower - Max7 VAMounting TypeChasis MountSize / Dimension-Size / Dimension-Height - Seated (Max)-Wite Leads4000VrmsWieght0.32 lb (145.15g)	Manufacturer Part Number	62031
Power TransformersPackage-SeriesStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChasis MountSize / Dimension-Size / Dimension-Height - Seated (Max)-Wieght0.32 lb (145.15g)	Manufacturer	Talema Group LLC
Package-SeriesStandard MiniTypeToroidalVoltage - PrimaryIst7, 230VVoltage - Secondary (Full Load)Parallel 97, Series 189mACurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)NoPower - MaxNoPower - MaxYaVAMounting TypeChasis MountSter/DimensionVir LeadsSter/Dimension-Height - Seated (Max)-Woltage - Isolation-With Leads-Sterley - Seated (Max)-With Loads-With Loads-Sterley - Seated (Max)-With Loads-With Loads-With Loads-Sterley - Seated (Max)-With Loads-With Loads- <td>Category</td> <td>Transformers</td>	Category	Transformers
SeriesStandard MiniTypeToroidalYoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChasis MountStez / Dimension.Stez / Dimension.Height - Seated (Max).Wite Leads.Wite Loadstoin.Witege - Isolation.Weight.Stez / Dimension.Stez / Dimension. <t< td=""><td></td><td>Power Transformers</td></t<>		Power Transformers
TypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChasis MountStez / Dimension-Size / Dimension-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Package	-
Yoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleSire / DimensionSize / Dimension-Height - Seated (Max)-Woltage - Isolation0.32 lb (145.15g)	Series	Standard Mini
Voltage - Secondary (Full Load)Parallel 9V, Series 18VCurrent - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)4000VrmsWoltage - Isolation0.32 lb (145.15g)	Туре	Toroidal
Current - Output (Max)Parallel 778mA, Series 389mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Voltage - Secondary (Full Load)	Parallel 9V, Series 18V
Secondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Current - Output (Max)	Parallel 778mA, Series 389mA
Center TapNoPower - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Primary Winding(s)	Dual
Power - Max7 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Secondary Winding(s)	Single, Multiple Taps
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Center Tap	No
Termination StyleWire LeadsSize / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Power - Max	7 VA
Size / Dimension-Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Mounting Type	Chassis Mount
Height - Seated (Max)-Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Termination Style	Wire Leads
Voltage - Isolation4000VrmsWeight0.32 lb (145.15g)	Size / Dimension	-
Weight 0.32 lb (145.15g)	Height - Seated (Max)	-
	Voltage - Isolation	4000Vrms
Report errors?	Weight	0.32 lb (145.15g)
		Report errors?

62031 Guarantees

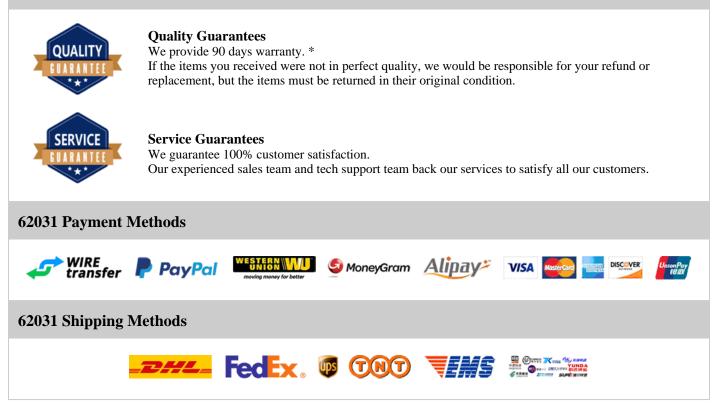

If you have any question about 62031, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com