

62053

62053 Information



 Part Number
 62053

 Manufacturer
 Talema Group LLC

 Category
 Transformers Power Transformers

 Description
 XFRMR TOROIDAL 15VA CHAS MOUNT

 Package

 For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



62053 Specifications

ManufacturerTalema Group LLCCategoryTransformersPackage-Package-SeriesStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)Single, Multiple TapsCenter TapNoPower - MaxI5 VAMounting TypeChassis MountSize / Dimension-Size / Dimension-Height - Seated (Max)4000rmsVoltage - Isolation4000rms		
CategoryTransformersPackage-PackageStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountSize / Dimension-Height - Seated (Max)24.00mmWoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Manufacturer Part Number	62053
Power TransformersPackage-SeriesStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChasis MountSize / Dimension-Size / Dimension24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Manufacturer	Talema Group LLC
Package-SeriesStandard MiniTypeToroidalVoltage - PrimaryI15V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmWoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Category	Transformers
SeriesStandard MiniTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation0578 lb (262.18g)		Power Transformers
TypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - MaxI5 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Package	-
A115V, 230VVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation0.578 lb (262.18g)	Series	Standard Mini
Voltage - Secondary (Full Load)Parallel 15V, Series 30VCurrent - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Туре	Toroidal
Current - Output (Max)Parallel 1A, Series 500mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Voltage - Secondary (Full Load)	Parallel 15V, Series 30V
Secondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Current - Output (Max)	Parallel 1A, Series 500mA
Center TapNoPower - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Primary Winding(s)	Dual
Power - Max15 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Secondary Winding(s)	Single, Multiple Taps
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Center Tap	No
Termination StyleWire LeadsSize / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Power - Max	15 VA
Size / Dimension-Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Mounting Type	Chassis Mount
Height - Seated (Max)24.00mmVoltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Termination Style	Wire Leads
Voltage - Isolation4000VrmsWeight0.578 lb (262.18g)	Size / Dimension	-
Weight 0.578 lb (262.18g)	Height - Seated (Max)	24.00mm
-	Voltage - Isolation	4000Vrms
Report errors?	Weight	0.578 lb (262.18g)
		Report errors?

62053 Guarantees

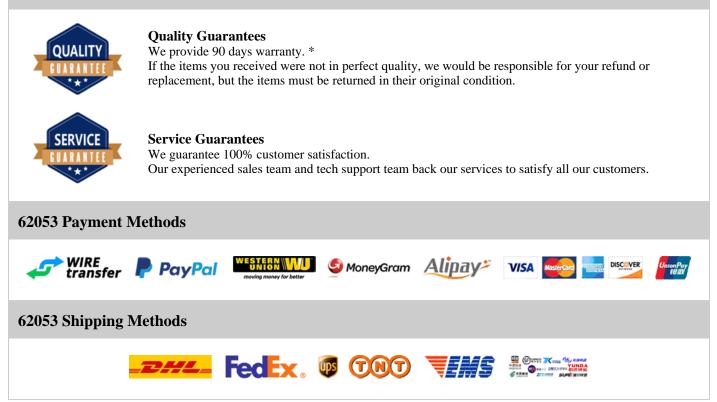

If you have any question about 62053, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com