

## 63453-324

Quote

## 63453-324 Information

Contract lands they	Part Number	63453-324	
	Manufacturer	Amphenol FCI	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 24POS T/H GOLD	nº4
	Package	-	- m 2
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Reque

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 63453-324 Specifications

Manufacturer Part Number63453-324ManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Muning TypePush-PullContact Finish - MatingSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJipin (0.38µm)Contact Finish - MatingGoldContact Finish - MatingGoldContact Finish - Mating15µin (0.38µm)Contact Finish Thickness - Mating15µin (0.38µm)Contact Finish Thicknes - Mating0.177" (4.50mm)Contact Funish Thicknes - Mating0.098" (2.50mm)		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingJipin (0.38µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)	Manufacturer Part Number	63453-324
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOidContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Manufacturer	Amphenol FCI
Package-SeriesMintek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - Mating50derContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.17" (4.50mm)	Category	Connectors, Interconnects
SeriesMinitek?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.17"" (4.50mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldIonater Finish Thickness - MatingIspin (0.38µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)FareninationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingBlackInsulation ColorBlackInsulation Height0.177" (4.50mm)	Series	Minitek?
StyleBoard to BoardStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Connector Type	Receptacle
Yumber of Positions24Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontact Finish Thickness - MatingIspin (0.38µm)Insulation ColorBlackInsulation Height0.17" (4.50mm)	Number of Positions	24
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Termination	Solder
Contact Finish Thickness - Mating15µin (0.38µm)Insulation ColorBlackInsulation Height0.177" (4.50mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.177" (4.50mm)	Contact Finish - Mating	Gold
Insulation Height 0.177" (4.50mm)	Contact Finish Thickness - Mating	15µin (0.38µm)
	Insulation Color	Black
Contact Length - Post 0.098" (2.50mm)	Insulation Height	0.177" (4.50mm)
	Contact Length - Post	0.098" (2.50mm)
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

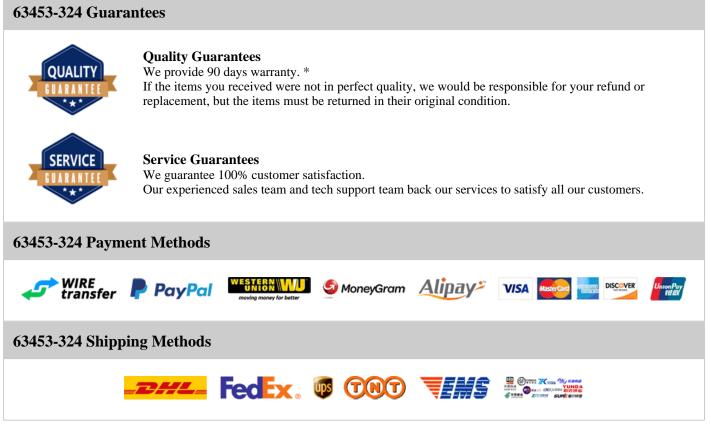

If you have any question about 63453-324, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com