

# 65002-215LF

#### 65002-215LF Information

Description Package	CONN RCPT -	前茶来
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	Request a Quote
F	<b>'ackage</b>	For the pricing/inventory/lead time, please contact

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 65002-215LF Specifications

Manufacturer Part Number65002-215LFManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBergCon?Connector TypeReceptacleConnector TypeReceptacleStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - MatingSolderMounting TypeThrough Hole, Right AngleFreminationSolderFastening TypePush-PullContact Finish - MatingDin (2.54µm)				
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBergCon?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81 mm)Number of Rows2Row Spacing - Mating0.150" (3.81 mm)Mounting TypeSolderFerminationSolderFerminationSolderFortact Finish - MatingTin	Manufacturer Part Number	65002-215LF		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesBergCon?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - MatingDisol" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Manufacturer	Amphenol FCI		
Package-SeriesBergCon?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - MatingDisfor (3.81mm)Mounting TypeThrough Hole, Right AngleFastening TypePush-PullContact Finish - MatingTin	Category	Connectors, Interconnects		
SeriesBergCon?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150° (3.81mm)Number of Rows2Row Spacing - MatingDis0° (3.81mm)Mounting TypeThrough Hole, Right AngleFastening TypeSolderFastening TypeTin		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleFastening TypeSolderFastening TypeTin	Package	-		
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Series	BergCon?		
StyleBoard to Board or CableNumber of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Connector Type	Receptacle		
Number of Positions30Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Style	Board to Board or Cable		
Pitch - Mating0.150" (3.81mm)Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Positions	30		
Number of Rows2Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Positions Loaded	All		
Row Spacing - Mating0.150" (3.81mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Pitch - Mating	0.150" (3.81mm)		
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingTin	Row Spacing - Mating	0.150" (3.81mm)		
Fastening TypePush-PullContact Finish - MatingTin	Mounting Type	Through Hole, Right Angle		
Contact Finish - Mating Tin	Termination	Solder		
	Fastening Type	Push-Pull		
Contact Finish Thickness - Mating 100µin (2.54µm)	Contact Finish - Mating	Tin		
	Contact Finish Thickness - Mating	100µin (2.54µm)		
Insulation Color Black	Insulation Color	Black		
Insulation Height 0.290" (7.37mm)	Insulation Height	0.290" (7.37mm)		
Contact Length - Post 0.115" (2.92mm)	Contact Length - Post	0.115" (2.92mm)		
Operating Temperature -	Operating Temperature	-		
Material Flammability Rating -	Material Flammability Rating	-		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
		Report errors	?

## 65002-215LF Guarantees




#### **Quality Guarantees**

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

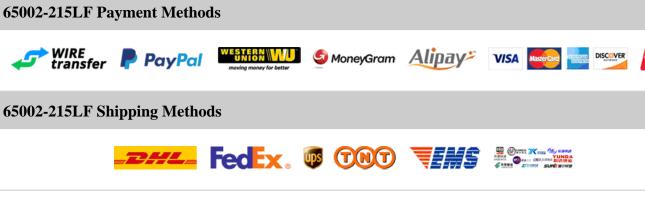

If you have any question about 65002-215LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com