

## 66926-011

u Quote

## 66926-011 Information

	Part Number	66926-011	
Heisener.com	Manufacturer	Amphenol FCI	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 22POS T/H R/A GOLD	1256
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com	Reques
		E-mail: salesdept@heisener.com	

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## 66926-011 Specifications

Manufacturer Part Number66926-011ManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-Package-Series-Connector TypeReceptacles, Female SocketsContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTornigh TypeQualContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBlackInsulation Heicht0.200" (6 10mm)				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeReceptacleContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllNumber of Rows2Number of Rows0.100" (2.54mm)Number of Rows0.100" (2.54mm)Number of RowsSocketStolerSocketContact Type-Stoler Spacing TypeOther Stoler S	Manufacturer Part Number	66926-011		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeReceptacleContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleFerminationSolderFastening TypeOush PullContact Finish - MatingGoldContact Finish - MatingBack	Manufacturer	Amphenol FCI		
Package-Series-Connector TypeReceptacleContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeQui AllContact Finish - MatingGoldContact Finish Thickness - MatingBlack	Category	Connectors, Interconnects		
Series-Connector TypeReceptacleContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypeQualContact Finish - MatingGoldKontact Finish - MatingBack		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeNongh Hole, Right AngleFareninationSolderFastening TypeOldoContact Finish - MatingGoldKontact Finish - MatingBiak	Package	-		
Contact TypeFemale SocketStyle-Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonater Finish - MatingBlack	Series	-		
Style.Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsultion ColorBlack	Connector Type	Receptacle		
Number of Positions22Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingHoujin (1.02µm)Insulation ColorBlack	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlack	Style	-		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKontat Finish Thickness - MatingBlack	Number of Positions	22		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingHoµin (1.02µm)Insulation ColorBlack	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating40µin (1.02µm)Insulation ColorBlack	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating40µin (1.02µm)Insulation ColorBlack	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating40µin (1.02µm)Insulation ColorBlack	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating40µin (1.02µm)Insulation ColorBlack	Mounting Type	Through Hole, Right Angle		
Contact Finish - MatingGoldContact Finish Thickness - Mating40µin (1.02µm)Insulation ColorBlack	Termination	Solder		
Contact Finish Thickness - Mating40μin (1.02μm)Insulation ColorBlack	Fastening Type	Push-Pull		
Insulation Color Black	Contact Finish - Mating	Gold		
	Contact Finish Thickness - Mating	40µin (1.02µm)		
Insulation Height 0.240" (6.10mm)	Insulation Color	Black		
	Insulation Height	0.240" (6.10mm)		
Contact Length - Post 0.115" (2.92mm)	Contact Length - Post	0.115" (2.92mm)		
Operating Temperature -	Operating Temperature	-		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

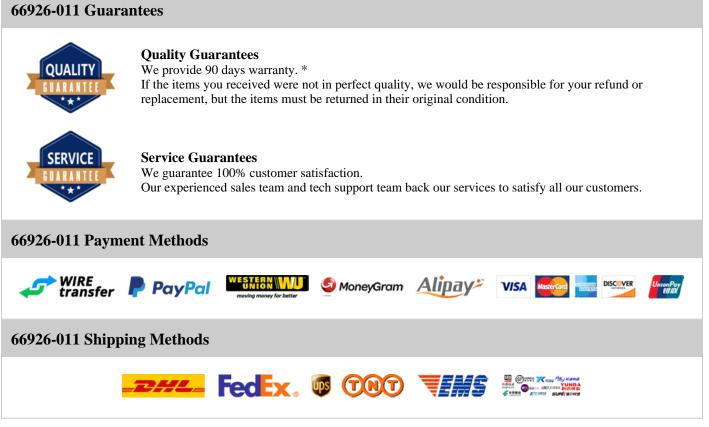

If you have any question about 66926-011, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com