

68-25 Information



Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



68-25 Specifications

Manufacturer Signal Transformers Category Transformers Package - Package - Stries - Type Laminated Core Voltage - Primary 105V, 115V, 125V, 230V Voltage - Secondary (Full Load) Parallel 34V, Series 68V Current - Output (Max) Parallel 50A, Series 25A Primary Winding(s) Dual Secondary Winding(s) Dual Power - Max 1700 VA Mounting Type Chassis Mount Signal Transformers Solder, Quick Connect Signal Transformers Solder, Quick Connect Maight - Seated (Max) 134.90mm		
CategoryTransformersPower TransformersPackagePackageSeriesStriesTypeLaminated CoreVoltage - PrimaryVoltage - Secondary (Full Load)Voltage - Secondary (Full Load)Current - Output (Max)Parallel 34V, Series 68VPrimary Winding(s)Secondary Winding(s)Cuter TapPower - MaxNounting TypeNounting TypeSider, Quick ConnectSize / DimensionSider, Quick ConnectHeight - Seated (Max)Voltage - IsolationWeightWeightWeightWeightState Secondary (Max)State Secondary (Max)Secondary Winding Secondary (Secondary Secondary Secondary (Secondary Secondary Secondary Secondary (Secondary Secondary Secondary Secondary Secondary (Secondary Secondary S	Manufacturer Part Number	68-25
InterfactPower TransformersPackage-Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChasis MountSize / DimensionSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)1500VrmsWeightMolts (18.1kg)	Manufacturer	Signal Transformer
Package-Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeSolder, Quick ConnectSter/ Dimension162.00mm Lx 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500 VrmsWeightMounting Seated (Max)WeightMounting Seated (Max)Ster Seated (Max)1500 VrmsSter Seated (Max)Ster Seated (Ma	Category	Transformers
Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmWotage - Isolation1500VrmsWeight40 lbs (18.1kg)		Power Transformers
TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmWoitge - Isolation1500VrmsWeightMolts (18.1kg)	Package	-
Yoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmWoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Series	-
Voltage - Secondary (Full Load)Parallel 34V, Series 68VCurrent - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Туре	Laminated Core
Current - Output (Max)Parallel 50A, Series 25APrimary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Voltage - Primary	105V, 115V, 125V, 230V
Primary Winding(s)DualSecondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Voltage - Secondary (Full Load)	Parallel 34V, Series 68V
Secondary Winding(s)DualCenter TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500 VrmsWeight40 lbs (18.1kg)	Current - Output (Max)	Parallel 50A, Series 25A
Center TapYesPower - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Primary Winding(s)	Dual
Power - Max1700 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Secondary Winding(s)	Dual
Mounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Center Tap	Yes
Termination StyleSolder, Quick ConnectSize / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Power - Max	1700 VA
Size / Dimension162.00mm L x 184.20mm WHeight - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Mounting Type	Chassis Mount
Height - Seated (Max)134.90mmVoltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Termination Style	Solder, Quick Connect
Voltage - Isolation1500VrmsWeight40 lbs (18.1kg)	Size / Dimension	162.00mm L x 184.20mm W
Weight 40 lbs (18.1kg)	Height - Seated (Max)	134.90mm
-	Voltage - Isolation	1500Vrms
Report errors?	Weight	40 lbs (18.1kg)
		Report errors?

68-25 Guarantees

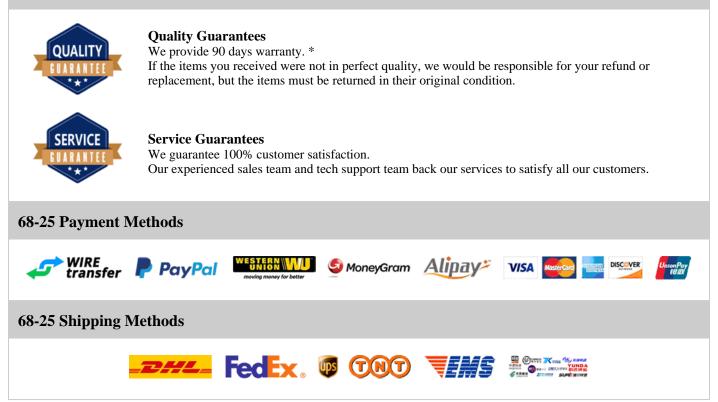

If you have any question about 68-25, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com