

68046-349LF

uest a Quote

68046-349LF Information

Container com	Part Number	68046-349LF	
	Manufacturer	Amphenol FCI	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	CONN RCPT 98POS .100" DBL SMD	
	Package	-	
		For the pricing/inventory/lead time, please contact	
For Reference Only		us	
		Website: https://www.heisener.com	
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



68046-349LF Specifications

Manufacturer Part Number68046-349LFManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeReceptacleSortact TypeBoard to BoardNumber of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows2Row Spacing - MatingSolderMounting TypeSurface MountMounting TypeSurface MountContact Finish - MatingGold or Gold, GXT?Contact Finish - MatingJojin (0.76µm)Surface MountSurface MountFinish - MatingSurface MountContact Finish - MatingGold or Gold, GXT?Contact Finish - MatingJojin (0.76µm)Contact Finish - MatingJojin (0.76µm)Surface MountSurface MountContact Finish - MatingJojin (0.76µm)Contact Finish - MatingGold or Cold, GXT?Contact Finish - MatingJojin (0.76µm)Surface MountSurface MountInsulation ColorBlackSurface MountSurface MountSurface MountSurface MountContact Finish - MatingJojin (0.76µm)Contact Finish - MatingSurface MountSurface MountSurface MountSurface MountSurface MountContact Finish - MatingSurface MountSurface MountSurface Mount <th></th> <th></th>			
Category Category Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Dubox? Connector Type Receptacle Contact Type Receptacle Outox? Female Socket Style Board to Board Number of Positions 98 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type Surface Mount Yaree Mount Solder Fermination Solder Fortact Finish - Mating Gold or Gold, GXT? Contact Finish Thickness - Mating Jupin (0.76µm) Insulation Color Black Insulation Flepher Solin" (7.87mm) Solar (7.87mm) Jupin (7.87mm)	Manufacturer Part Number	68046-349LF	
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature65°C ~ 125°C	Manufacturer	Amphenol FCI	
Package-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Yenning TypeSolderFerninationSolderFortaut TypeSolderContact Finish - MatingOldor Gold, GXT?Contact Finish Thickness - MatingJoin (0.64mm)Insulation ColorBlackInsulation Height0.310° (7.87mm)Contact Length - Post-Solder TypeSolderSolder TypeSolder SolderSolder Solder SolderSolder SolderSolder Solder SolderSolder SolderSolder Solder Solder Solder SolderSolder Solder SolderSolder Solder	Category	Connectors, Interconnects	
SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - MatingGold or Gold, GXT?Contact Finish - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature65°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - MatingSolder Gold, GXT?Konstor ColorBlackInsulation ColorSollor (7.87mm)Insulation Height0.30" (7.87mm)Contact Finish - Post-Store TypeSolder ColorInsulation Height0.30" (7.87mm)Contact Finish - Post-Store TypeSolder ColorStore Type <td< td=""><td>Package</td><td>-</td></td<>	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature65°C ~ 125°C	Series	Dubox?	
StyleBoard to BoardStyleBoard to BoardNumber of Positions98Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Connector Type	Receptacle	
Number of Positions 98 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Termination Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold or Gold, GXT? Contact Finish Thickness - Mating Jouin (0.76µm) Insulation Color Black Insulation Height 0.310" (7.87mm) Contact Length - Post - Operating Temperature -65°C ~ 125°C	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingBlackInsulation ColorSloler' (7.87mm)Contact Length - Post-Contact Length - Post-Operating Temperature65°C ~ 125°C	Style	Board to Board	
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingBlackInsulation ColorJ.310" (7.87mm)Contact Length - Post-50°C ~ 125°C	Number of Positions	98	
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature65°C ~ 125°C	Number of Positions Loaded	All	
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeSurface MountMounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Row Spacing - Mating	0.100" (2.54mm)	
Fastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature65°C ~ 125°C	Mounting Type	Surface Mount	
Contact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Termination	Solder	
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Contact Finish - Mating	Gold or Gold, GXT?	
Insulation Height0.310" (7.87mm)Contact Length - Post-Operating Temperature-65°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)	
Contact Length - Post-Operating Temperature-65°C ~ 125°C	Insulation Color	Black	
Operating Temperature $-65^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.310" (7.87mm)	
	Contact Length - Post	-	
	Operating Temperature	-65°C ~ 125°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

68046-349LF Guarantees




Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



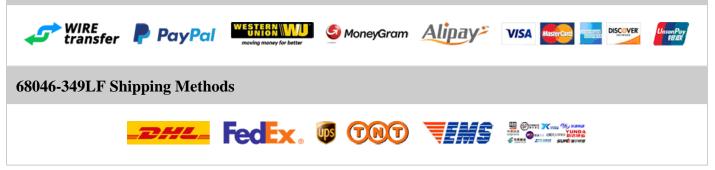

If you have any question about 68046-349LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com