

70075K

70075K Information



Part Number	70075K	
Manufacturer	Talema Group LLC	
Category	Transformers Power Transformers	
Description	XFRMR TOROIDAL 35VA THRU HOLE	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



70075K Specifications

Manufacturer Part Number 70075K Manufacturer Falema Group LLC Category Fransformers Package - Package - Strikes 7XXX Type Toroidal Voltage - Primary 15V, 230V Voltage - Secondary (Full Load) Parallel 22V, Series 44V Current - Output (Max) Parallel 1.59A, Series 795mA Primary Winding(s) Dual Secondary Winding(s) Single, Multiple Taps Power - Max 35 VA Mounting Type Prinary Hole Size / Dimension 72.00mm Lx 72.00mm W Height - Seated (Max) 37.50mm Woltage - Isolation MOVTrms		
CategoryTransformersPackage-Series7XXXXTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleSize / DimensionPC PinSize / Dimension7.200mm L x 72.00mm WHeight - Seated (Max)37.50mmWoithge - IsolationM00VrmsWeight11b (433.59g)	Manufacturer Part Number	70075K
Power TransformersPackage-Series7XXXTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight11b (453.59g)	Manufacturer	Talema Group LLC
Package-Series7XXXTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCheter TapNoPower - Max35 VAMounting TypeThrough HoleSter/ Dimension72.00mm Lx 72.00mm WSize/ Dimension37.50mmVoltage - Isolation4000VrmsWeight116 (453.59g)	Category	Transformers
Series7XXXXTypeToroidalYoltage - Primary115V, 230VYoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmWoutper Loadiant100VrmsWeight11b (453.59g)		Power Transformers
TypeToroidalTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension7.200mm L x 72.00mm WHeight - Seated (Max)37.50mmWoltage - IsolationHoloVrmsWeight1 bt (453.59g)	Package	-
ValueInstructionVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmWoltage - IsolationHole States (Max)Weight11b (453.59g)	Series	7XXXX
Voltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmWoltage - IsolationHoloYrmsWeight1 b (453.59g)	Туре	Toroidal
Current - Output (Max)Parallel 1.59A, Series 795mAPrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - IsolationHo0VrmsWeight1 lb (453.59g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Voltage - Secondary (Full Load)	Parallel 22V, Series 44V
Secondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight11b (453.59g)	Current - Output (Max)	Parallel 1.59A, Series 795mA
Center TapNoPower - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Primary Winding(s)	Dual
Power - Max35 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Secondary Winding(s)	Single, Multiple Taps
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Center Tap	No
Termination StylePC PinSize / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Power - Max	35 VA
Size / Dimension72.00mm L x 72.00mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Mounting Type	Through Hole
Height - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1 lb (453.59g)	Termination Style	PC Pin
Voltage - Isolation4000VrmsWeight1 lb (453.59g)	Size / Dimension	72.00mm L x 72.00mm W
Weight 1 lb (453.59g)	Height - Seated (Max)	37.50mm
	Voltage - Isolation	4000Vrms
Report errors?	Weight	1 lb (453.59g)
		Report errors?

70075K Guarantees

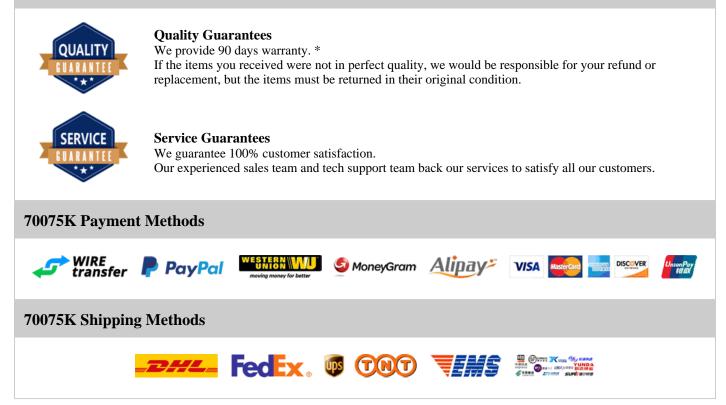

If you have any question about 70075K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com