

70085K

70085K Information



Part Number	70085K	
Manufacturer	Talema Group LLC	
Category	Transformers Power Transformers	
Description	XFRMR TOROIDAL 50VA THRU HOLE	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



70085K Specifications

Manufacturer Part Number70085KManufacturerTalena Group LLCCategoryTransformersPackage-Series7XXXTypeToroidalVoltage - Primary115V, 230VVoltage - Scondary (Full Load)Paralel 22V, Series 44VCurrent - Output (Max)Paralel 2272A, Series 1.136APrimary Winding(s)Single, Multiple TapsPower - MaxSo VAMounting TypeSo VAMounting TypePrinarySteir JinanionSingle, Multiple TapsPower - MaxSo VAMounting TypeStoroidanuHeight - Seated (Max)StoroidanuVoltage - IsolationStoroidanuWinding TypeStoroidanuMounting TypeStoroidanuMaufing TypeStoroidanuMaufing TypeStoroidanuMauting TypeStoroidanu		
CategoryTransformersPackage-Series7XXXXTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleSize / Dimension82.40mm Lx 82.40mm WSize / Dimension37.50mmVoltage - Isolation4000VrmsWeight1.5 bs (680.4g)	Manufacturer Part Number	70085K
Power TransformersPackage-Series7XXXXTypeToroidalVoltage Primary115V, 230VVoltage Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleSize / Dimension82.40mm L x 82.40mm WSize / Dimension37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Manufacturer	Talema Group LLC
Package-Series7XXXXTypeToroidalVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsPower - Max0 VAMounting TypeThrough HoleTermination StyleSel 240mm Lx 82.40mm WSize / Dinension37.50mmHeight - Seated (Max)400VrmsWeightSize (Sel.4g)	Category	Transformers
Series7XXXXTypeToroidalYoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination Style82.40mm L x 82.40mm WSize / Dimension37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)		Power Transformers
TypeToroidalYoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination StyleSecondary Minding(s)Size / Dimension82.40mm Lx 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Package	-
YVoltage - Primary115V, 230VVoltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination Style82.40mm L x 82.40mm WSize / Dimension37.50mmHeight - Seated (Max)37.50mmWoltage - Isolation1.5 lbs (680.4g)	Series	7XXXX
Voltage - Secondary (Full Load)Parallel 22V, Series 44VCurrent - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination Style82.40mm L x 82.40mm WSize / Dimension37.50mmHeight - Seated (Max)4000VrmsWeight1.5 lbs (680.4g)	Туре	Toroidal
Current - Output (Max)Parallel 2.272A, Series 1.136APrimary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Voltage - Primary	115V, 230V
Primary Winding(s)DualSecondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Voltage - Secondary (Full Load)	Parallel 22V, Series 44V
Secondary Winding(s)Single, Multiple TapsCenter TapNoPower - Max50 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Current - Output (Max)	Parallel 2.272A, Series 1.136A
Center TapNoPower - Max50 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Primary Winding(s)	Dual
Power - Max50 VAMounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Secondary Winding(s)	Single, Multiple Taps
Mounting TypeThrough HoleTermination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Center Tap	No
Termination StylePC PinSize / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Power - Max	50 VA
Size / Dimension82.40mm L x 82.40mm WHeight - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Mounting Type	Through Hole
Height - Seated (Max)37.50mmVoltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Termination Style	PC Pin
Voltage - Isolation4000VrmsWeight1.5 lbs (680.4g)	Size / Dimension	82.40mm L x 82.40mm W
Weight 1.5 lbs (680.4g)	Height - Seated (Max)	37.50mm
· · · · · · · · · · · · · · · · · · ·	Voltage - Isolation	4000Vrms
Report errors?	Weight	1.5 lbs (680.4g)
		Report errors?

70085K Guarantees

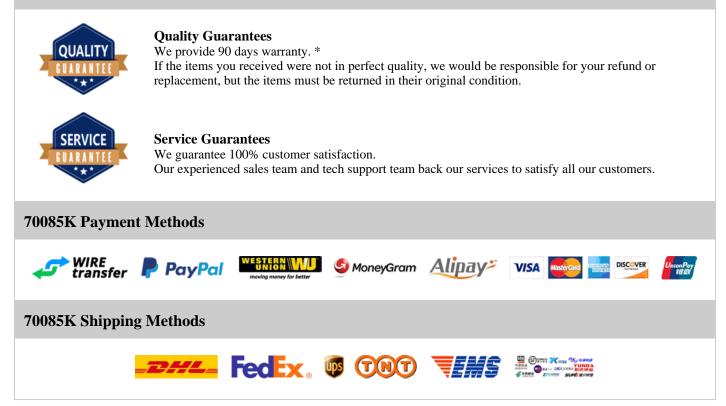

If you have any question about 70085K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com