


## **714A Information**



## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.

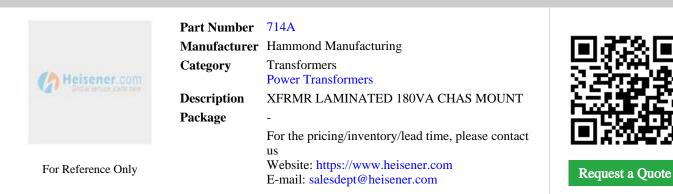

## **714A Specifications**

ManufacturerHammond ManufacturingCategoryTransformersPower TransformersPower TransformersPackage-Series700TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)SingleSeriodary Winding(s)SingleSecondary Winding(s)SinglePower - Max180 VAMounting TypeChasis MountSize / DimensionSize Scondary Winding(s)Size / DimensionSize Scondary Winding(s)Sourd Start AgeSigleStart AgeSigleStart AgeSize MountStart AgeSize MountSize / DimensionSize Scondary Winding(s)Start JohnensionSize Scondary Winding(s)Start AgeSize Scondary Winding(s)Start AgeSize Scondary Winding Scondary		
CategoryTransformersPackage-Series700TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)-Woltage - Isolation-Weight5.5 lbs (2.5kg)	Manufacturer Part Number	714A
Power TransformersPackage-Series700TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountSize / Dimension9.25mm L x 79.50mm WHeight - Seated (Max)-Voltage - Isolation-WeightS. Isolation	Manufacturer	Hammond Manufacturing
Package-Series700TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleSize/DimensionSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)-Wotage - Isolation-WeightStals (S.Skg)	Category	Transformers
Series700TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)YesPower - Max180 VAMounting TypeChasis MountTermination StyleSiz25mm L x 79.50mm WBight - Seated (Max)95.25mm L x 79.50mm WWietge - Isolation-WeightStolbs (2.5kg)		Power Transformers
TypeLaminated CoreVoltage - Primary117V, 234VVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SinglePower - Max180 VAMounting TypeChassis MountTermination StyleSize/DimensionSize / Dimension95.25mm L x 79.50mm WVoltage - Isolation-WeightSize (Size)	Package	-
Voltage - PrimaryInterventionVoltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleS125mm L x 79.50mm WSize / Dimension95.25mmHeight - Seated (Max)95.25mmVoltage - Isolation5.5 lbs (2.5kg)	Series	700
Voltage - Secondary (Full Load)1020VCurrent - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Туре	Laminated Core
Current - Output (Max)170mAPrimary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-WeightSis (2.5kg)	Voltage - Primary	117V, 234V
Primary Winding(s)SingleSecondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)-Voltage - Isolation-Weight5.5 lbs (2.5kg)	Voltage - Secondary (Full Load)	1020V
Secondary Winding(s)SingleCenter TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Current - Output (Max)	170mA
Center TapYesPower - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Primary Winding(s)	Single
Power - Max180 VAMounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Secondary Winding(s)	Single
Mounting TypeChassis MountTermination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Center Tap	Yes
Termination StyleWire LeadsSize / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Power - Max	180 VA
Size / Dimension95.25mm L x 79.50mm WHeight - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Mounting Type	Chassis Mount
Height - Seated (Max)95.25mmVoltage - Isolation-Weight5.5 lbs (2.5kg)	Termination Style	Wire Leads
Voltage - Isolation-Weight5.5 lbs (2.5kg)	Size / Dimension	95.25mm L x 79.50mm W
Weight 5.5 lbs (2.5kg)	Height - Seated (Max)	95.25mm
	Voltage - Isolation	-
Report errors?	Weight	5.5 lbs (2.5kg)
		Report errors?

## **714A Guarantees**

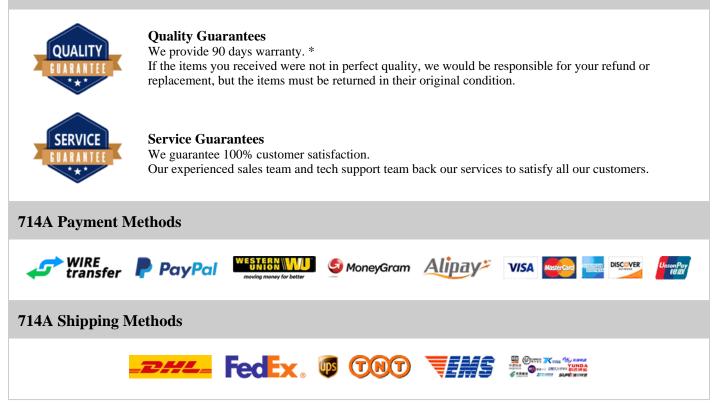

If you have any question about 714A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com