

747829-4

747829-4 Information



Part Number	747829-4	
Manufacturer	TE Connectivity AMP Connectors	
Category	Connectors, Interconnects D-Sub Connectors	
Description	CONN D-SUB PLUG 25POS R/A SOLDER	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



747829-4 Specifications

Manufacturer TE Connectivity AMP Connectors Connectors, Interconnects D-sub Connectors Package - Series AMPLIMITE HD-20 Connector Style D-sub Connector Connector Style D-Sub Connector Connector Type Plug, Male Pins Connector Type 25 Shell Size, Connector Layout 3 (DB, B) Contact Type Signal Mounting Type Through Hole, Right Angle Flange Feature Board Lock, Ground Strap, Grounding Indents Shell Material, Finish Steel, Tin Plated Contact Finish Thickness 30µin (0.76µm) Contact Finish Thickness UL94 V-0		
CategoryConnectorsPackage-SeriesAMPLIMITE HD-20Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions2Shell Size, Connector Layout3 (DB, B)Contact TypeFinough Hole, Right AngleMounting TypeFinough Hole, Right AngleFlange FeatureSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30juin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Manufacturer Part Number	747829-4
D-Sub ConnectorsPackage-SeriesAMPLIMITE HD-20Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions25Number of Rows2Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeatureHousing/Shell (4-40)FeaturesSolderShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Angeres Protection-Material Flammability RatingUL94 V-0	Manufacturer	TE Connectivity AMP Connectors
Package-SeriesAMPLIMITE HD-20Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions25Number of Rows3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeatureBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessGoldContact Finish ThicknessJujin (0.76µm)Muterial Flammability RatingUL94 V-0	Category	Connectors, Interconnects
SeriesAMPLIMITE HD-20Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions25Number of Rows2Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeatureBoard Lock, Ground Strap, Grounding IndentsFeaturesSolderShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0		D-Sub Connectors
Connector StyleD-SubConnector TypePlug, Male PinsNumber of Positions25Number of Rows3 (DB, B)Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeatureBoard Lock, Ground Strap, Grounding IndentsFeaturesSteel, Tin PlatedShell Material, FinishGoldContact Finish Thickness30µin (0.76µm)Ingress ProtectionJUS4 Y-0	Package	-
Connector TypePlug, Male PinsNumber of Positions25Number of Rows2Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleHousing/Shell (4-40)SolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Series	AMPLIMITE HD-20
Number of Positions25Number of Rows2Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleHousing/Shell (4-40)Flange FeatureHousing/Shell (4-40)FeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Connector Style	D-Sub
Number of Rows2Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleHousing/Shell (4-40)SolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Connector Type	Plug, Male Pins
Shell Size, Connector Layout3 (DB, B)Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeatureHousing/Shell (4-40)FerminationSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Number of Positions	25
Contact TypeSignalMounting TypeThrough Hole, Right AngleFlange FeaturesHousing/Shell (4-40)FeaturesSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact Finish ThicknessGoldIngress Protection-Material Flammability RatingUL94 V-0	Number of Rows	2
Mounting TypeThrough Hole, Right AngleFlange FeatureHousing/Shell (4-40)FerminationSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Shell Size, Connector Layout	3 (DB, B)
Flange FeatureHousing/Shell (4-40)TerminationSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Contact Type	Signal
TerminationSolderFeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Mounting Type	Through Hole, Right Angle
FeaturesBoard Lock, Ground Strap, Grounding IndentsShell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Flange Feature	Housing/Shell (4-40)
Shell Material, FinishSteel, Tin PlatedContact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Termination	Solder
Contact FinishGoldContact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Features	Board Lock, Ground Strap, Grounding Indents
Contact Finish Thickness30µin (0.76µm)Ingress Protection-Material Flammability RatingUL94 V-0	Shell Material, Finish	Steel, Tin Plated
Ingress Protection - Material Flammability Rating UL94 V-0	Contact Finish	Gold
Material Flammability Rating UL94 V-0	Contact Finish Thickness	30µin (0.76µm)
	Ingress Protection	-
Report errors?	Material Flammability Rating	UL94 V-0
		Report errors?

747829-4 Guarantees

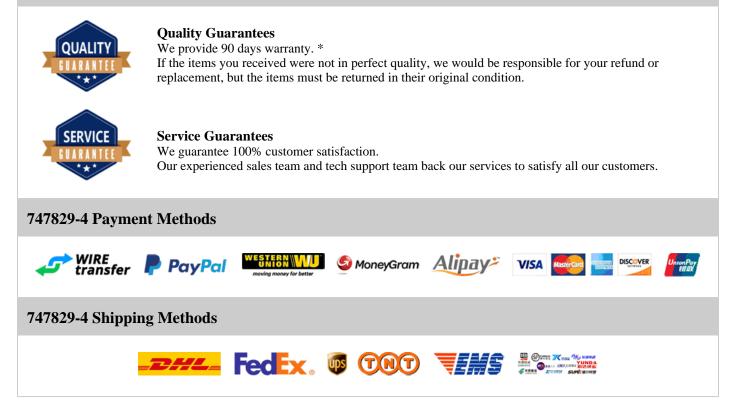

If you have any question about 747829-4, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com