

## 74B-3 Information



Part Number	74B-3	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE AT&T COLUMBUS	
Package	Cartridge, Non-Standard	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

# For Reference Only

### **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



#### 74B-3 Specifications

ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageCartridge, Non-StandardStries74Fuse TypeCatrridgeCurrent Rating3AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFectrical, IndustrialApplicationsElectrical, IndustrialFusa SynowCatrridgeOperating Temperature-Operating Temperature-Breaking Capacity @ Rated Voltage-Breaking Capacity @ Rated Voltage-Aponting TypeHolderPackage / CaseCatrridge, Non-Standard			
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCartridge, Non-StandardSeries74Fuse TypeCartridgeCurrent Rating3AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0281" Diax 1.250" L (7.14mm x 31.75mm)	Manufacturer Part Number	74B-3	
Bit of the second sec	Manufacturer	Eaton	
PackageCartridge, Non-StandardSeries74Fuse TypeCartridgeCurrent Rating3AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Category	Circuit Protection	
Series74Fuse TypeCartridgeCurrent Rating3AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)		Electrical, Specialty Fuses	
Fuse TypeCartridgeFuse TypeGartridgeCurrent RatingSAVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Package	Cartridge, Non-Standard	
Current Rating3ACurrent Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / Case0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Series	74	
Voltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Fuse Type	Cartridge	
Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Current Rating	3A	
Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Voltage Rating - AC	-	
ApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Voltage Rating - DC	60V	
Features-Features-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Response Time	Fast	
Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Applications	Electrical, Industrial	
ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Features	-	
Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Class	-	
Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Approvals	CE, UR	
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Operating Temperature	-	
Package / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Breaking Capacity @ Rated Voltage	-	
Size / Dimension 0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Mounting Type	Holder	
	Package / Case	Cartridge, Non-Standard	
Report errors?	Size / Dimension	0.281" Dia x 1.250" L (7.14mm x 31.75mm)	
			Report errors?

#### 74B-3 Guarantees

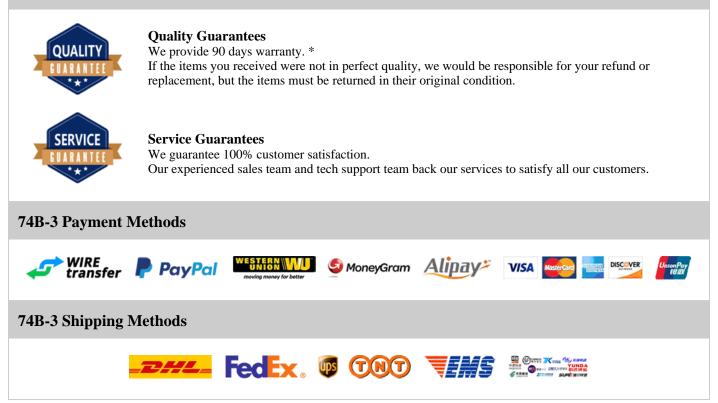

If you have any question about 74B-3, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com