

# 74D-10

#### 74D-10 Information



Part Number	74D-10	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE AT&T COLUMBUS	
Package	Cartridge, Non-Standard	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

## **Certified Quality**


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



### 74D-10 Specifications

ManufacturerEatonCategoryCircuit ProtectionPackageElectrical, Specialty FusesPackageCartridge, Non-StandardStries74Fuse TypeCatridgeCurrent Rating10AVoltage Rating - AC60VVoltage Rating - DCFuse TypeApplicationsElectrical, IndustrialFuser Symposition60VClass-ApprovalsElectrical, IndustrialOperating Temperature-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCatridge, Non-Standard		
CategoryCircuit ProtectionBeckageElectrical, Specialty FusesPackageCartridge, Non-StandardSeries74Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Mounting TypeHolderPackage / CaseCattridge, Non-StandardSize / DimensionSettringe, Non-StandardSize / DimensionSettringe, Non-Standard	Manufacturer Part Number	74D-10
Bit of the second sec	Manufacturer	Eaton
PackageCartridge, Non-StandardSeries74Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Category	Circuit Protection
Series74Fuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeFuse TypeCartridgeCurrent Rating10AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Diax 1.250" L (7.14mm x 31.75mm)	Package	Cartridge, Non-Standard
Current Rating10AVoltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Series	74
Voltage Rating - AC-Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Fuse Type	Cartridge
Voltage Rating - DC60VResponse TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Current Rating	10A
Response TimeFastApplicationsElectrical, IndustrialFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Voltage Rating - AC	-
ApplicationsElectrical, IndustrialApplications-Features-Class-ApprovalsCE, UROperating Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Voltage Rating - DC	60V
Features-Features-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Response Time	Fast
Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Applications	Electrical, Industrial
ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Class	-
Breaking Capacity @ Rated Voltage-Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Approvals	CE, UR
Mounting TypeHolderPackage / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Operating Temperature	-
Package / CaseCartridge, Non-StandardSize / Dimension0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Breaking Capacity @ Rated Voltage	-
Size / Dimension 0.281" Dia x 1.250" L (7.14mm x 31.75mm)	Mounting Type	Holder
	Package / Case	Cartridge, Non-Standard
Report errors?	Size / Dimension	0.281" Dia x 1.250" L (7.14mm x 31.75mm)
		Report errors?

#### 74D-10 Guarantees

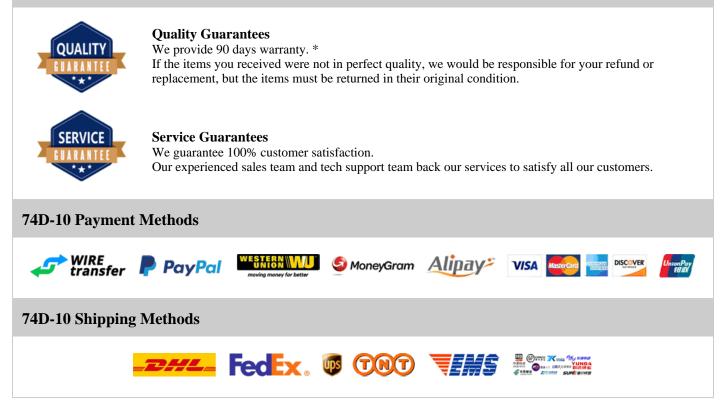

If you have any question about 74D-10, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com