

76341-405LF

76341-405LF Information

	Contraction of the second seco	 76341-405LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 5POS .100 SGL STR PCB	
	For Reference Only	For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



76341-405LF Specifications

Manufacturer Part Number76341-405LFManufacturerAmphenol FCICategoryConnectors, InterconnectsPackage-Package-SeriesDubox?Contact TypeReceptacles, Female SocketsContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedAllNumber of Rows1Number of Rows1Number of Rows1Number of RowsSolderStyleSolderNumber of Rows1Stolard TypeSolderStolard TypeSolderStolard SpaceSolderStolard SpaceSolder <trr>Stolard SpaceSolder<</trr>		
ActegoryConnectors, InterconnectsPackage-SeriesDubox?Connector TypeReceptacleConnector TypeReceptacleConnector TypeSeriesStyleBoard to BoardNumber of Positions5Number of Positions LoadedIPich - Mating0.100"(2.54mm)Number of Rows1Number of Rows0.100"(2.54mm)Number of Rows5Number of Rows1SolderFrenziententententententententententententente	Manufacturer Part Number	76341-405LF
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderMounting TypePitch-PositionSolderSolderFerninationSolderForta Finish - MatingTinContact Finish - Mating18.7µin (2.0µm)Contact Finish Thickness - MatingBileInsulation ColorBlueInsulation Finish0.127" (6.99mm)Contact Length - Post0.114" (2.90mm)	Manufacturer	Amphenol FCI
Package-SeriesDubo?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFerninationSolderContact Finish - MatingNigh - Nigh AllContact Finish - MatingSolderInsulation ColorRigh - QuantyInsulation Finish - MatingSolderContact Finish Thickness - MatingSolderInsulation Finish - MatingSolde	Category	Connectors, Interconnects
SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeVin PublicContact Finish - Mating1SolderFinalInsulation Color8.162Insulation Height0.275" (6.99mm)Contact Funst - Post0.114" (2.90mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - Mating18.Contact Finish - Mating19.Insulation Color18.Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish - Mating8.7µin (2.0µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Series	Dubox?
StyleBoard to BoardNumber of Positions5Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-PriminationStolerFareninationSolderFortact Finish - MatingTinContact Finish - Mating88, pin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Connector Type	Receptacle
Number of Positions 5 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating 7in Isulation Color Blue Insulation Height 0.275" (6.99mm) Contact Length - Post 0.114" (2.90mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationSolderFastening TypePush-PullContact Finish - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Number of Positions	5
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating8lueInsulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating78.7μin (2.00μm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating78.7μin (2.00μm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Mounting Type	Through Hole
Contact Finish - MatingTinContact Finish Thickness - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Termination	Solder
Contact Finish Thickness - Mating78.7µin (2.00µm)Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Fastening Type	Push-Pull
Insulation ColorBlueInsulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Contact Finish - Mating	Tin
Insulation Height0.275" (6.99mm)Contact Length - Post0.114" (2.90mm)	Contact Finish Thickness - Mating	78.7µin (2.00µm)
Contact Length - Post 0.114" (2.90mm)	Insulation Color	Blue
-	Insulation Height	0.275" (6.99mm)
Operating Temperature -	Contact Length - Post	0.114" (2.90mm)
	Operating Temperature	-
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	11.04mm
Ingress Protection	-
Features	-
	Report errors?

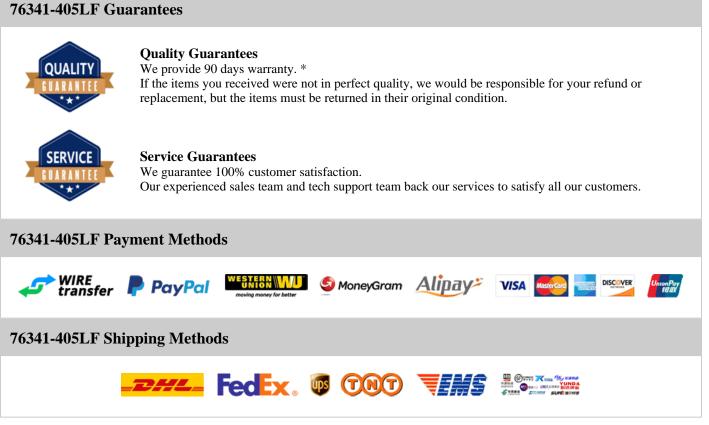

If you have any question about 76341-405LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com