

79107-0024

79107-0024 Information

| | | 79107-0024 Molex Connector Corporation | ലക്ഷ് ല |
|--------------------|-------------|--|--------------------|
| www.httpsentuk.com | Category | Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets | |
| | Description | CONN RECEPT 2MM 50POS VERT | - 33 - 32 - |
| | Package | - | IN STATES |
| For Reference Only | | For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com | Request a Quote |

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



79107-0024 Specifications

| Manufacturer Part Number | 79107-0024 |
|-----------------------------------|---|
| Manufacturer | Molex Connector Corporation |
| Category | Connectors, Interconnects |
| | Rectangular Connectors - Headers, Receptacles, Female Sockets |
| Package | - |
| Series | Milli-Grid? 79107 |
| Connector Type | Receptacle |
| Contact Type | Female Socket |
| Style | Board to Board or Cable |
| Number of Positions | 50 |
| Number of Positions Loaded | All |
| Pitch - Mating | 0.079" (2.00mm) |
| Number of Rows | 2 |
| Row Spacing - Mating | 0.079" (2.00mm) |
| Mounting Type | Through Hole |
| Termination | Solder |
| Fastening Type | Push-Pull |
| Contact Finish - Mating | Gold |
| Contact Finish Thickness - Mating | 15µin (0.38µm) |
| Insulation Color | Black |
| Insulation Height | 0.175" (4.45mm) |
| Contact Length - Post | 0.118" (3.00mm) |
| Operating Temperature | -55°C ~ 125°C |
| Material Flammability Rating | - |

| Contact Finish - Post | Tin-Lead | |
|------------------------|----------|----------------|
| Mated Stacking Heights | - | |
| Ingress Protection | - | |
| Features | _ | |
| | | Report errors? |

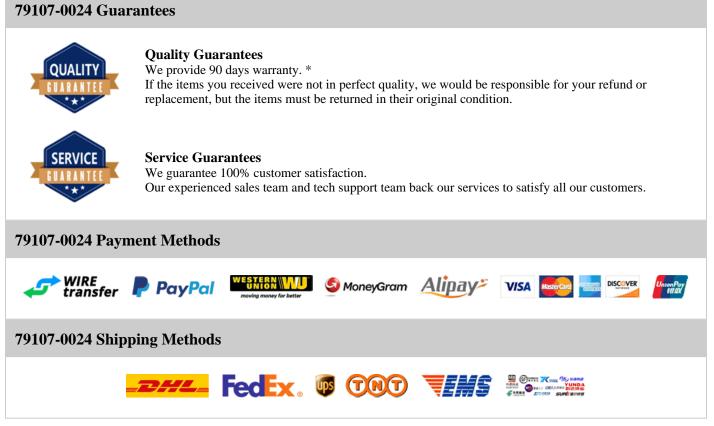

If you have any question about 79107-0024, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com