

80-4 Information



Part Number	80-4	
Manufacturer	Signal Transformer	
Category	Transformers Power Transformers	
Description	XFRMR LAMINATED 320VA CHAS MOUNT	
Package	-	
	For the pricing/inventory/lead time, please contact	
	us	
	Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



80-4 Specifications

Manufacturer Part Number 80-4 Manufacturer Signal Transformers Category Fower Transformers Package - Stries - Type Laminated Core Voltage - Primary 105V, 115V, 125V, 230V Voltage - Secondary (Full Load) Parallel 40V, Series 80V Current - Output (Max) Parallel 8A, Series 4A Stordary Winding(s) Single, Multiple Taps Secondary Winding(s) Jual Power - Max 320 VA Mounting Type Chasis Mount Steir JDimension Sider, Quick Connect Size / Dimension 133.40mm Lx 108.00mm W Voltage - Isolation 111.0mm Voltage - Isolation 1500 Vrms		
CategoryTransformers Power TransformersPackage-Series-TypeLaminated CoreVoltage Primary105V, 115V, 125V, 230VVoltage Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChasis MountSiz / DimensionJi Solder, Quick ConnectSiz / Dimension11.10mmHeight - Seated (Max)1500VrmsWeightSing Solgen, Sigen, Sig	Manufacturer Part Number	80-4
PackagePower TransformersPackage-Series-TypeLaminated CoreVoltage Primary105V, 115V, 125V, 230VVoltage Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)1500VrmsWeight131 bs (5.9kg)	Manufacturer	Signal Transformer
Package	Category	Transformers
Series-TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension113.40mm L x 108.00mm WHeight - Seated (Max)500VrmsWotght13 bs (5.9kg)		Power Transformers
TypeLaminated CoreVoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)1500VrmsWight13 lbs (5.9kg)	Package	-
Yoltage - Primary105V, 115V, 125V, 230VVoltage - Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmWoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Series	-
Voltage - Secondary (Full Load)Parallel 40V, Series 80VCurrent - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Туре	Laminated Core
Current - Output (Max)Parallel 8A, Series 4APrimary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Voltage - Primary	105V, 115V, 125V, 230V
Primary Winding(s)Single, Multiple TapsSecondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Voltage - Secondary (Full Load)	Parallel 40V, Series 80V
Secondary Winding(s)DualCenter TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Current - Output (Max)	Parallel 8A, Series 4A
Center TapYesPower - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Primary Winding(s)	Single, Multiple Taps
Power - Max320 VAMounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Secondary Winding(s)	Dual
Mounting TypeChassis MountTermination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Center Tap	Yes
Termination StyleSolder, Quick ConnectSize / Dimension133.40mm L x 108.00mm WHeight - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Power - Max	320 VA
Size / Dimension 133.40mm L x 108.00mm W Height - Seated (Max) 111.10mm Voltage - Isolation 1500Vrms Weight 13 lbs (5.9kg)	Mounting Type	Chassis Mount
Height - Seated (Max)111.10mmVoltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Termination Style	Solder, Quick Connect
Voltage - Isolation1500VrmsWeight13 lbs (5.9kg)	Size / Dimension	133.40mm L x 108.00mm W
Weight 13 lbs (5.9kg)	Height - Seated (Max)	111.10mm
	Voltage - Isolation	1500Vrms
Report errors?	Weight	13 lbs (5.9kg)
		Report errors?

80-4 Guarantees

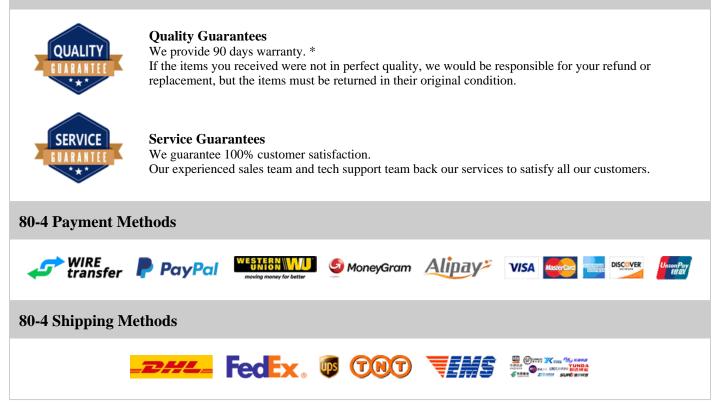

If you have any question about 80-4, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com