

801-43-023-10-001000

801-43-023-10-001000 Information





Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



801-43-023-10-001000 Specifications

Manufacturer Part Number801-43-023-10-001000ManufacturerMill-Max Manufacturing Corp.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series801Connector TypeReceptacleContact TypeFemale SocketSyleBoard to BoardNumber of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows1Number of MatingSolderNumber of SoldingSolderStering TypeInough HoleStering TypeSolderContact Finish - MatingSolderStering TypeSolderFerninationSolderStation ColorBlackStation ColorBlackStation Finish - Mating0.276° (7.00mm)Station Finish Thickness - Mating0.276° (7.00mm)Station Finish Thicknes - MatingSolderStation Finish Thicknes - MatingSolar (7.00mm)Station Finish Thicknes - MatingSolar (7.00mm)Stat					
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series801Connector TypeReceptacleContact TypeReceptacleContact TypeBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.76µm)Contact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Contact Length - Post0.118" (3.00mm)Contact Finish Thickness - Mating0.58°C ~ 125°C	Manufacturer Part Number	801-43-023-10-001000			
Package.Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldForta Erinsh Thickness - MatingGoldContact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Mill-Max Manufacturing Corp.			
Package-Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.276° (7.00mm)Contact Length - Post0.118° (3.00mm)Operating Temperature-55° C ~ 125°C	Category	Connectors, Interconnects			
Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.276° (7.00mm)Contact Fungt- Post0.118° (3.00mm)Contact Fungt- Post55° C~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets			
Connector Type Receptacle Contact Type Female Socket Style Board to Board Number of Positions 23 Number of Positions Loaded All Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Young Type Solder Fastening Type Qual (0.76µm) Contact Finish - Mating Gold Contact Finish - Mating Board (0.76µm) Insulation Color Black Insulation Height 0.276° (7.00mm) Contact Length - Post 0.118° (3.00mn) Operating Temperature -55°C ~ 125°C	Package	-			
Contact TypeFenale SocketStyleBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Series	801			
StyleBoard to BoardNumber of Positions23Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature55°C ~ 125°C	Connector Type	Receptacle			
Number of Positions23Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Contact Type	Female Socket			
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board			
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-Mounting TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Contact Fungerature55°C ~ 125°C	Number of Positions	23			
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All			
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)			
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1			
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-			
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30μin (0.76μm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole			
Contact Finish - MatingGoldContact Finish Thickness - Mating $30\mu in (0.76\mu m)$ Insulation ColorBlackInsulation Height $0.276" (7.00mm)$ Contact Length - Post $0.118" (3.00mm)$ Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Termination	Solder			
Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.276" (7.00mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Fastening Type	Push-Pull			
Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold			
Insulation Height 0.276" (7.00mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)			
Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black			
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.276" (7.00mm)			
	Contact Length - Post	0.118" (3.00mm)			
	Operating Temperature	-55°C ~ 125°C			
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0			

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

801-43-023-10-001000 Payment Methods

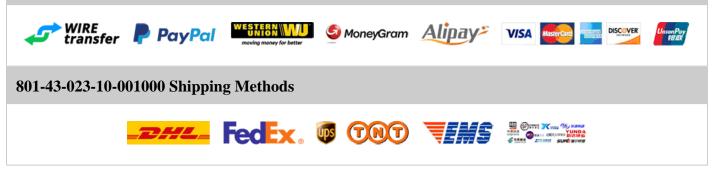

If you have any question about 801-43-023-10-001000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com