

801-93-019-10-001000

801-93-019-10-001000 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



801-93-019-10-001000 Specifications

Manufacturer Part Number801-93-019-000000ManufacturerMill-Max Manufacturing Corp.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series801Connector TypeReceptacles, Genetacles, Female SocketsConnector TypeReceptacle SocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedJNumber of Positions Loaded0.100" (2.54mm)Number of Rows1Number of RowsSolderFerminationSolderStyleSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingJupin (0.76µm)Sulation ColorBlackInsulation ColorBlackInsulation Leight0.276" (7.00mm)Contact Length - PostJ184 V.0Materiel Ethermentitive RegimeJ184 V.0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.76µm)Contact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Contact Length - Post0.118" (3.00mm)Contact Timperature-55°C ~ 125°C	Manufacturer Part Number	801-93-019-10-001000
PackageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypeOsldContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Mill-Max Manufacturing Corp.
Package-Series801Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Typeof RoderYerminationSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJackInsulation ColorBlackInsulation Height0.276° (7.00mn)Contact Length - Post0.118° (3.00mm)Operating Temperature55° C~ 125°C	Category	Connectors, Interconnects
Series801Connector TypeReceptacleConnector TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.276° (7.00mm)Contact Fungt-PostSillen GoldmanneInsulation Height0.58°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllNumber of Rows0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBiakInsulation Height0.276° (7.00mm)Contact Fungersture0.118° (3.00mm)Contact Fungersture55° C~ 125°C	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Series	801
StyleBoard to BoardStyleBoard to BoardNumber of Positions19Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Connector Type	Receptacle
Number of Positions 19 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.276" (7.00mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Contact Fungerature55°C ~ 125°C	Number of Positions	19
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating $30\mu n (0.76\mu m)$ Insulation ColorBlackInsulation Height $0.276" (7.00mm)$ Contact Length - Post $0.118" (3.00mm)$ Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Termination	Solder
Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.276" (7.00mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.276" (7.00mm)Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height 0.276" (7.00mm) Contact Length - Post 0.118" (3.00mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post0.118" (3.00mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.276" (7.00mm)
	Contact Length - Post	0.118" (3.00mm)
Material Flammability Pating UII 04 V 0	Operating Temperature	-55°C ~ 125°C
Viaterial Franklindom VL74 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin-Lead
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?





Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

801-93-019-10-001000 Payment Methods

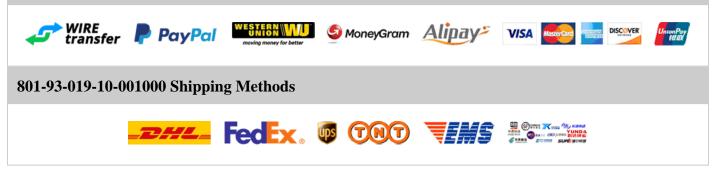

If you have any question about 801-93-019-10-001000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com