

805-43-066-10-012000

805-43-066-10-012000 Information

| | Part Number Manufacturer | 805-43-066-10-012000 Mill-Max Manufacturing Corp. | | |
|--------------------|-----------------------------|--|-----------------|--|
| | Category | Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets | | |
| | Description | CONN SOCKET 66POS .100" 3ROW T/H | | |
| | Package | - | 回致致感 | |
| For Reference Only | | For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com | Request a Quote | |

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



805-43-066-10-012000 Specifications

| Manufacturer Part Number805-43-066-10-012000ManufacturerMill-Max Manufacturing Corp.CategoryConnectors, InterconnectsPackage-Series805Connector TypeReceptacles, Receptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows3Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingSolderContact Finish Thickness - MatingSolderContact Length - PostSolderContact Length - PostSolder | | | |
|--|-----------------------------------|---|--|
| CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series805Connector TypeReceptacleContact TypeReceptacleContact TypeBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuin (0.76µm)Contact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Contact Fungereaure-55°C ~ 125°C | Manufacturer Part Number | 805-43-066-10-012000 | |
| Package.Series805Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows3Row Spacing - Mating0.100° (2.54mm)Mounting TypeDinor (2.54mm)Young TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJujin (0.76µm)Insulation ColorBlackInsulation Height0.165° (4.20mm)Contact Length - Post0.125° (3.18mm)Contact Fung TypeSolderSolderSolderContact Finish Thickness - MatingSolderInsulation ColorBlackSolder | Manufacturer | Mill-Max Manufacturing Corp. | |
| Package-Series805Connector TypeReceptacleContact TypeFomale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows3Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)Young TypeSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJoin (0.6µm)Insulation ColorBlackInsulation Height0.155° (3.18mm)Operating Temperature-55° C~ 125°C | Category | Connectors, Interconnects | |
| Series805Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows3Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.105° (3.18mm)Contact Fungt-Post55°C ~ 125°C | | Rectangular Connectors - Headers, Receptacles, Female Sockets | |
| Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows3Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleTerminationSolderFortant Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.105° (3.18mm)Contact FungerAperAperAperAperAperAperAperAperAperAp | Package | - | |
| Contact TypeFenale SocketStyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.00% (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Series | 805 | |
| StyleBoard to BoardNumber of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3/uin (0.76µm)Insulation ColorBlackInsulation Height0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Connector Type | Receptacle | |
| Number of Positions66Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleYourgh TypeSolderFareninationSolderForater Finish - MatingGoldContact Finish - MatingSoldin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post55°C ~ 125°C | Contact Type | Female Socket | |
| Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Style | Board to Board | |
| Pitch - Mating0.100" (2.54mm)Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)YerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 125°C | Number of Positions | 66 | |
| Number of Rows3Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Number of Positions Loaded | All | |
| Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3/µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature55°C ~ 125°C | Pitch - Mating | 0.100" (2.54mm) | |
| Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Number of Rows | 3 | |
| TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Row Spacing - Mating | 0.100" (2.54mm) | |
| Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30μin (0.76μm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Mounting Type | Through Hole | |
| Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Termination | Solder | |
| Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Fastening Type | Push-Pull | |
| Insulation ColorBlackInsulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Contact Finish - Mating | Gold | |
| Insulation Height0.165" (4.20mm)Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Contact Finish Thickness - Mating | 30µin (0.76µm) | |
| Contact Length - Post0.125" (3.18mm)Operating Temperature-55°C ~ 125°C | Insulation Color | Black | |
| Operating Temperature $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$ | Insulation Height | 0.165" (4.20mm) | |
| | Contact Length - Post | 0.125" (3.18mm) | |
| Material Flammability Rating UL94 V-0 | Operating Temperature | -55°C ~ 125°C | |
| | Material Flammability Rating | UL94 V-0 | |

| Contact Finish - Post | Tin | |
|------------------------|-----|----------------|
| Mated Stacking Heights | - | |
| Ingress Protection | - | |
| Features | - | |
| | | Report errors? |

805-43-066-10-012000 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

805-43-066-10-012000 Payment Methods

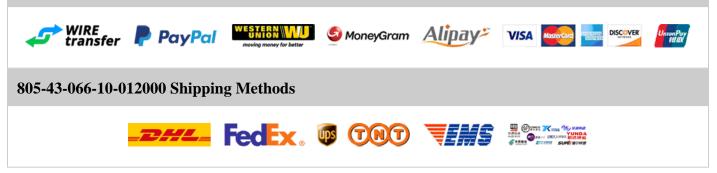

If you have any question about 805-43-066-10-012000, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com