

833-83-040-10-273101

833-83-040-10-273101 Information

Virv heitener.com	Part Number Manufacturer Category Description	833-83-040-10-273101 Preci-Dip Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets PCB CONN SOLDER TAIL 2MM	
	Package	-	前後受難
For Reference Only	5	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



833-83-040-10-273101 Specifications

Manufacturer Part Number833-83-040-10-273101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeBoard to BoardNumber of Positions40Number of Positions LoadedInformationNumber of Rows2Row Spacing - Mating0.079° (2.00mn)Number of Rows0.079° (2.00mn)Number of RowsSolderTerminationSolderSteining TypeSolderContact Finish - Mating0.079° (2.00mn)Maufing UppeSolderTerminationSolderSteining TypeGoldContact Finish - Mating0.010° (2.00mn)Contact Finish - MatingSolderSteining TypeUsh-PullContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingJackInsulation ColorBackInsulation Height1.10° (2.79mn)Contact Lengt - Post0.122° (3.10mn)Contact Finish ThicknessSolzeSteining TypeSolzeSteining TypeSolzeContact Finish ThicknessMatingSteining TypeSolzeContact Finish ThicknessSolzeSteining TypeSolzeSteining TypeSolzeSteining TypeSolzeSteining TypeSolzeSt				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeBoard to BoardNumber of Positions40Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0:079° (2:00mm)Number of Rows0:079° (2:00mm)Number of Rows0:079° (2:00mm)Number of Rows0:079° (2:00mm)Number of Rows0:019° (2:00mm)Number of Rows0:010° (2:00mm)	Manufacturer Part Number	833-83-040-10-273101		
Image: Part of the sector of	Manufacturer	Preci-Dip		
Package-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQuidContact Finish - MatingGoldContact Finish Thickness - Mating9.55 (1.57m)Insulation ColorBlackInsulation Height0.110" (2.79mn)Contact Length - Post0.122" (3.10mm)Contact Fungth - Post0.55°C ~ 125°C	Category	Connectors, Interconnects		
Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting TypeThrough HoleTerminationSolderContact Finish - Mating0.019° (2.00mm)Contact Finish - MatingGoldContact Finish - MatingBischInsulation ColorBiackInsulation Height0.110° (2.79mm)Contact Length - Post0.122° (3.10mm)Contact Finish Thotenes55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFenale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypeSolderContact Finish - Mating0.95 (2.015µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.12" (3.10mm)Operating Temperature55°C ~ 125°C	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions40Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - Mating0.0175 µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)	Series	833		
Style Board to Board Number of Positions 40 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Farmination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 29.5µin (0.75µm) Insulation Color Black Insulation Height 0.110" (2.79mm) Contact Length - Post 0.122" (3.10mm) Operating Temperature -55°C ~ 125°C	Connector Type	Socket		
Number of Positions 40 Number of Positions Loaded All Pitch - Mating 0.079" (2.00mm) Number of Rows 2 Row Spacing - Mating 0.079" (2.00mm) Mounting Type 0.079" (2.00mm) Termination 0.079" (2.00mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 9.5µin (0.75µm) Insulation Color Black Insulation Height 0.110" (2.79mm) Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Number of Positions	40		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating9.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5μin (0.75μm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating29.5µin (0.75µm)Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.110" (2.79mm)Contact Length - Post0.122" (3.10mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height 0.110" (2.79mm) Contact Length - Post 0.122" (3.10mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	29.5µin (0.75µm)		
Contact Length - Post 0.122" (3.10mm) Operating Temperature -55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.110" (2.79mm)		
	Contact Length - Post	0.122" (3.10mm)		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

833-83-040-10-273101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

833-83-040-10-273101 Payment Methods

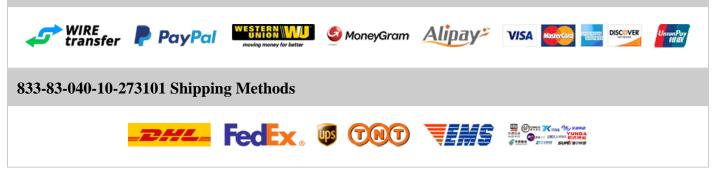

If you have any question about 833-83-040-10-273101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com