

833-83-048-10-001101

833-83-048-10-001101 Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



833-83-048-10-001101 Specifications

Manufacturer Part Number\$33-83-048-10-001101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderTerminationSolderFastening TypePush-PullContact Finish - MatingGold				
CategoryConnectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Manufacturer Part Number	833-83-048-10-001101		
ImageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Manufacturer	Preci-Dip		
Package-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Category	Connectors, Interconnects		
Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Series	833		
StyleBoard to BoardNumber of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Connector Type	Socket		
Number of Positions48Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Number of Positions	48		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-Pull	Number of Rows	2		
TerminationSolderFastening TypePush-Pull	Row Spacing - Mating	0.079" (2.00mm)		
Fastening Type Push-Pull	Mounting Type	Through Hole		
	Termination	Solder		
Contact Finish - Mating Gold	Fastening Type	Push-Pull		
	Contact Finish - Mating	Gold		
Contact Finish Thickness - Mating 29.5µin (0.75µm)	Contact Finish Thickness - Mating	29.5µin (0.75µm)		
Insulation Color Black	Insulation Color	Black		
Insulation Height 0.165" (4.20mm)	Insulation Height	0.165" (4.20mm)		
Contact Length - Post 0.125" (3.18mm)	Contact Length - Post	0.125" (3.18mm)		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

833-83-048-10-001101 Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

833-83-048-10-001101 Payment Methods

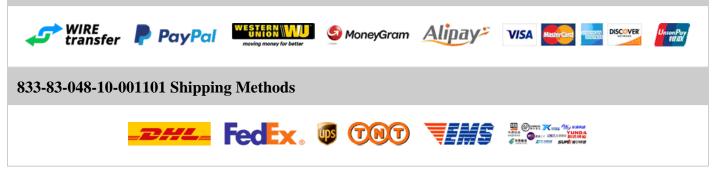

If you have any question about 833-83-048-10-001101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com