

# 833-87-034-30-001101

### 833-87-034-30-001101 Information

	833-87-034-30-001101	
Manufacturer	-	Tel 6 Total Tel
Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Description Package	PCB CONN SURFACE MOUNT 2MM	
	-	- 同物分泌
erence Only	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# 833-87-034-30-001101 Specifications

Manufacturer Part Number833-87-034-30-001101ManufacturerPreci-DipCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeBoard to BoardNumber of Positions34Number of Positions LoadedInterconnector SupportNumber of Positions Loaded0.079" (2.00mm)Number of Rows2Row Spacing - MatingSolderYourge SpaceSolderFreminationSolderStriace MountSolderContact Finish - MatingSolderStriace SpaceSolderStriace SpaceSolderStriace MountSolderStriace MountSolderStriace SpaceSolderStriace Space <t< th=""><th></th><th></th></t<>				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeBoard to BoardNumber of Positions34Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mm)Mounting TypeSurface MountYerminationSolderFrankening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingFlashInsulation ColorBlackInsulation Flestin0.228° (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Manufacturer Part Number	833-87-034-30-001101		
Interfact Connectors - Headers, Receptacles, Female SocketsPackage-Series833Connector TypeSocketContact TypeBoard o BoardStyleBoard to BoardNumber of Positions34Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.079° (2.00mm)Number of Rows0.079° (2.00mm)Number of RowsSolderTerminationSolderStriening TypeSolderFortar TypeSolderContact Finish - MatingGoldContact Finish - MatingBlackInsulation ColorBlackInsulation Height0.28° (S.00mm)Contact Length - Post-SolderSolderSolder SolderSolderSolder Solder	Manufacturer	Preci-Dip		
Package-Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSoiderTerminationSoiderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBlackInsulation FinishSizes (5.80mm)Finish Thickness - MatingSizes (5.80mm)Contact Finish Thickness - MatingSizes (5.80mm)Finisulation FinishSizes (5.80mm)Sizes (5.80mm)Sizes (5.80mm)Contact Finish TypeSizes (5.80mm)Sizes (5.80mm)Sizes (5.80mm)Sizes (5.80mm)Sizes (5.80mm)Contact Finish TypeSizes (5.80mm)Sizes (5.80mm)S	Category	Connectors, Interconnects		
Series833Connector TypeSocketContact TypeFemale SocketStyleBoard to BoardNumber of Positions34Number of Positions LoadedAllNumber of Rows2Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of Rows0.079" (2.00mm)Number of RowsSurface MountMounting TypeSurface MountTerminationSolderContact Finish - MatingGoldContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C~125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeSocketContact TypeFenale SocketStyleBoard to BoardNumber of Positions34Number of Positions LoadedAllNumber of Rows0.079" (.00mm)Number of Rows0.014Nourting TypeSolderYour of RowsSolderContact Finish - MatingSolderContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Soc ~ 125°C-	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Sperating Temperature-55°C ~ 125°C	Series	833		
StyleBoard to BoardNumber of Positions34Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Connector Type	Socket		
Number of Positions 34   Number of Positions Loaded All   Number of Positions Loaded 0.079" (2.00mm)   Number of Rows 2   Row Spacing - Mating 0.079" (2.00mm)   Mounting Type 0.079" (2.00mm)   Mounting Type Surface Mount   Termination Solder   Fastening Type Push-Pull   Contact Finish - Mating Gold   Contact Finish Thickness - Mating Flash   Insulation Color Black   Insulation Height 0.228" (5.80mm)   Contact Length - Post -   Operating Temperature -55°C ~ 125°C	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board		
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSurface MountFastening TypePosh-PullContact Finish - MatingGoldRoute ColorFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Sperating Temperature-Speratur	Number of Positions	34		
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingHashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.079" (2.00mm)		
Mounting TypeSurface MountForminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.079" (2.00mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Mounting Type	Surface Mount		
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height0.228" (5.80mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	Flash		
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.228" (5.80mm)		
	Contact Length - Post	-		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

## 833-87-034-30-001101 Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# 833-87-034-30-001101 Payment Methods

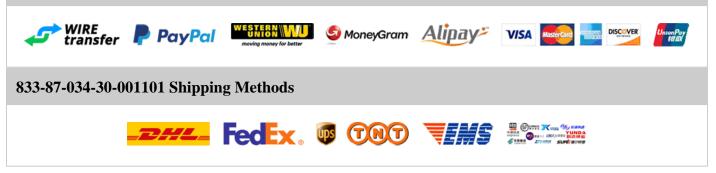

If you have any question about 833-87-034-30-001101, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com