

87021-625TRLF

quest a Quote

87021-625TRLF Information

Container.com	Part Number	87021-625TRLF
	Manufacturer	Amphenol FCI
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets
	Description	CONN RECPT 50POS .050" SMT DUAL
	Package	-
For Reference Only		For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com
		E-mail: salesdept@heisener.com

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



87021-625TRLF Specifications

Manufacturer Part Number87021-625TRLFManufacturerAmphenol FCICategoryConnectors InterconnectsPackage-Package-SeriesRib-Cage?Connector TypeReceptacles, Female SocketsContact TypeReceptacleStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllNumber of Rows2Row Spacing - MatingSolor (1.27mm)Mounting TypeSuface MountMounting TypeSuface MountFarening TypeSuface MountFortact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingJuji (0.76µm)Isulation ColorNaturaMating ColorSufar Color SufaceMating TypeSufar Color SufaceFinish Thickness - MatingSufar Color SufaceIsulation FleightSufar Color Sufar Color SufaceIsulation FleightSufar Color Sufar			
CategoryCategores, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesRib-Cage?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Number of Positions0.050" (1.27mm)Number of Rows0.050" (1.27mm)Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeOsderFastening TypeOsderContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingMatinalInsulation ColorNatural	Manufacturer Part Number	87021-625TRLF	
Actangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesRib-Cage?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFarminationSolderFastening TypeOud of Gold, GXT?Contact Finish - MatingGold or Gold, GXT?Insulation ColorNatural	Manufacturer	Amphenol FCI	
Package-SeriesRib-Cage?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingNatural	Category	Connectors, Interconnects	
SeriesRib-Cage?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Insulation ColorNatural		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingMuin (0.76µm)Insulation ColorNumale	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderFareninationSolderFastening TypeGold or Gold, GXT?Contact Finish - Mating30µin (0.76µm)Insulation ColorNatural	Series	Rib-Cage?	
StyleBoard to BoardNumber of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePosh-PullContact Finish - MatingGold or Gold, GXT?Insulation ColorNatural	Connector Type	Receptacle	
Number of Positions50Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingNumin (0.76µm)Insulation ColorNatural	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingNatural	Style	Board to Board	
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingSolqi or Gold, GXT?Fontact Finish Thickness - MatingNaturalMating ColorNatural	Number of Positions	50	
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorNatural	Number of Positions Loaded	All	
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - MatingJujin (0.76µm)Insulation ColorNatural	Pitch - Mating	0.050" (1.27mm)	
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorNatural	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorNatural	Row Spacing - Mating	0.050" (1.27mm)	
Fastening TypePush-PullContact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorNatural	Mounting Type	Surface Mount	
Contact Finish - MatingGold or Gold, GXT?Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorNatural	Termination	Solder	
Contact Finish Thickness - Mating30μin (0.76μm)Insulation ColorNatural	Fastening Type	Push-Pull	
Insulation Color Natural	Contact Finish - Mating	Gold or Gold, GXT?	
	Contact Finish Thickness - Mating	30µin (0.76µm)	
Insulation Height 0.187" (4.75mm)	Insulation Color	Natural	
	Insulation Height	0.187" (4.75mm)	
Contact Length - Post -	Contact Length - Post	-	
Operating Temperature -	Operating Temperature	-	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	Pick and Place		
		-	0

Report errors?

87021-625TRLF Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

87021-625TRLF Payment Methods

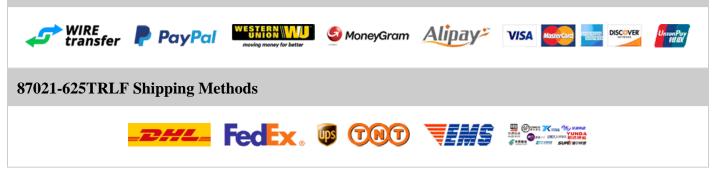

If you have any question about 87021-625TRLF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com