

89883-439LF

89883-439LF Information

Part Number Manufacturer Category Description Package		89883-439LF Amphenol FCI Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 78POS .100 DBL R/A PCB	
For Reference Only		For the pricing/inventory/lead time, please contact us	
To Reference Only		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



89883-439LF Specifications

Manufacturer Part Number89883-439LFManufacturerAmphenol FCICategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsAllNumber of Positions LoadedAllNumber of Rows2Row Spacing - MatingDi00" (2.54mm)Number of RowsSolderTerminationSolderFerninationSolderContact Finish - MatingTinContact Finish Thickness - MatingTin		
CategoryConectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of PositionsAllNumber of Positions Loaded0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeDiong Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Manufacturer Part Number	89883-439LF
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening Typepush-PullContact Finish - MatingTin	Manufacturer	Amphenol FCI
Package-SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - MatingDilou" (2.54mm)Mounting TypeThrough Hole, Right AngleFerminationSolderFastening TypeDush-PullContact Finish - MatingTin	Category	Connectors, Interconnects
SeriesDubox?Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough Hole, Right AngleFerminationSolderFastening TypeInsh-PullContact Finish - MatingTin		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough Hole, Right AngleFastening TypeSolderFastening TypeTin	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Series	Dubox?
StyleBoard to BoardNumber of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOn00" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingTin	Connector Type	Receptacle
Number of Positions78Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Positions	78
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTin	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingTin	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingTin	Mounting Type	Through Hole, Right Angle
Contact Finish - Mating Tin	Termination	Solder
	Fastening Type	Push-Pull
Contact Finish Thickness - Mating 78 7uin (2 00um)	Contact Finish - Mating	Tin
condict rinish rinekness mutting 70.7µm (2.00µm)	Contact Finish Thickness - Mating	78.7µin (2.00µm)
Insulation Color Blue	Insulation Color	Blue
Insulation Height 0.230" (5.85mm)	Insulation Height	0.230" (5.85mm)
Contact Length - Post 0.114" (2.90mm)	Contact Length - Post	0.114" (2.90mm)
Operating Temperature -	Operating Temperature	-
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

89883-439LF Guarantees




Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

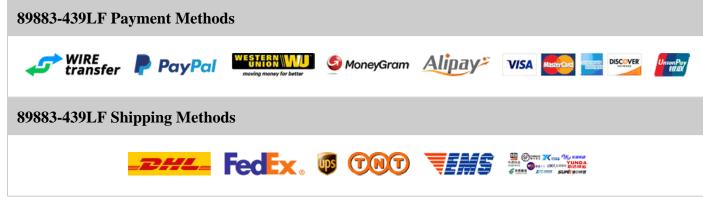

If you have any question about 89883-439LF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com