

939850-01-36-RB

939850-01-36-RB Information

Heisener.com	Part Number Manufacturer Category Description Package	939850-01-36-RB 3M Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN SOCKET 36POS STR .100" GOLD	
For Reference Only		For the pricing/inventory/lead time, please contact us	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



939850-01-36-RB Specifications

Manufacturer Part Number939850-01-36-RBManufacturer3MCategoryConnectors, InterconnectsPackage-Package-Series929Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions Loaded1Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFersininationKinked Pin, SolderFastening TypeQualContact Finish - MatingGold		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series929Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedIPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypePush-Pull	Manufacturer Part Number	939850-01-36-RB
ImageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series929Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFastening TypePush-Pull	Manufacturer	3M
Package-Series929Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Category	Connectors, Interconnects
Series929Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100"(2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Package	-
Contact TypeForkedStyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Series	929
StyleBoard to BoardNumber of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Connector Type	Receptacle
Number of Positions36Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Number of Positions	36
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationKinked Pin, SolderFastening TypePush-Pull	Number of Rows	1
TerminationKinked Pin, SolderFastening TypePush-Pull	Row Spacing - Mating	-
Fastening Type Push-Pull	Mounting Type	Through Hole
	Termination	Kinked Pin, Solder
Contact Finish - Mating Gold	Fastening Type	Push-Pull
	Contact Finish - Mating	Gold
Contact Finish Thickness - Mating 30µin (0.76µm)	Contact Finish Thickness - Mating	30µin (0.76µm)
Insulation Color Black	Insulation Color	Black
Insulation Height 0.325" (8.25mm)	Insulation Height	0.325" (8.25mm)
Contact Length - Post 0.125" (3.18mm)	Contact Length - Post	0.125" (3.18mm)
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

939850-01-36-RB Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

939850-01-36-RB Payment Methods

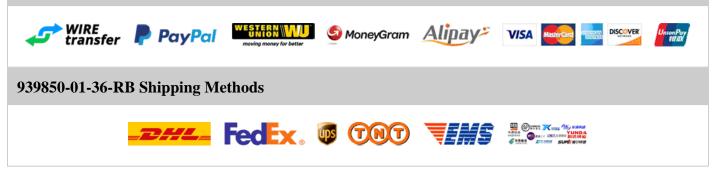

If you have any question about 939850-01-36-RB, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com