

956232-2720-AR-PR

956232-2720-AR-PR Information

Heisener.com	Manufacturer Category Description	956232-2720-AR-PR 3M Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN SOCKET 32POS 2MM VERT SMD	
For Reference Only	Package	- For the pricing/inventory/lead time, please contact	1916-722 874 V
		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



956232-2720-AR-PR Specifications

Manufacturer Part Number956232-2720-AR-PRManufacturer3MCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series956Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountYourder Finish Thickness - MatingSolderContact Finish Thickness - MatingGoldContact Finish Thickness - MatingGoldContact Finish Thickness - MatingFinish ContactContact Finish Thickness - MatingFinish Contact Finish Thickness - MatingContact Finish Thickness - MatingFinish Contact Finish Thickness - Mating		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series956Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFerninationSolderFastening TypeQuidGoldContact Finish - MatingIonattingGoldIonattinish - MatingFinishInsulation ColorBlackInsulation Height0.110" (2.79mm)	Manufacturer Part Number	956232-2720-AR-PR
Include Connectors - Headers, Receptacles, Female SocketsPackage-Series956Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows0.079° (2.00mn)Number of RowsSocketRow Spacing - MatingSocketPitch - MatingSocketRow Spacing - MatingSocketPitch - MatingSocketPitch - MatingSocketRow Spacing - MatingSocketPitch - MatingSocket<	Manufacturer	3M
Package-Series956Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountFastening TypeGolderContact Finish - MatingGoldContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Category	Connectors, Interconnects
Series956Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacle, Bottom EntryContact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingFashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Series	956
StyleBoard to BoardNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldRoust Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Connector Type	Receptacle, Bottom Entry
Number of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Style	Board to Board
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldRouter Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Number of Positions	32
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Number of Positions Loaded	All
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Row Spacing - Mating	0.079" (2.00mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Termination	Solder
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.110" (2.79mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.110" (2.79mm)	Contact Finish - Mating	Gold
Insulation Height 0.110" (2.79mm)	Contact Finish Thickness - Mating	Flash
	Insulation Color	Black
Contact Longth Bost	Insulation Height	0.110" (2.79mm)
-	Contact Length - Post	-
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide, Pick and Place

Report errors?

956232-2720-AR-PR Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

956232-2720-AR-PR Payment Methods

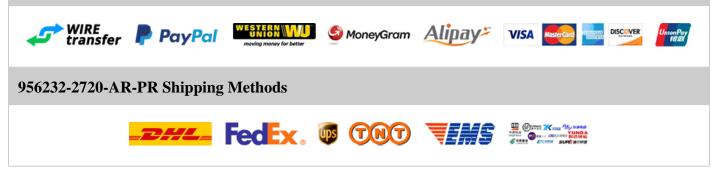

If you have any question about 956232-2720-AR-PR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com