


97-3106A-20-15S(946)

97-3106A-20-15S(946) Information

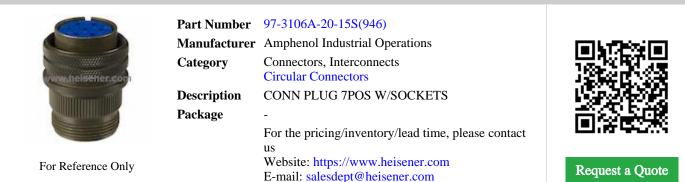

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



97-3106A-20-15S(946) Specifications

Manufacturer Part Number97.3106A-20-15S(946)ManufacturerAmphenol Industrial OperationsCategoryConnectors, InterconnectsPackage-Series97Connector TypePlug, Female SocketsNumber of Positions7Shell Size, MIL-Mounting TypeSolder CupFastening TypeSolder CupFastening TypeSolder CupFastening TypeN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFourter RatingSilverFastening Type-Shell Material, FinishSilverFourter RatingSilverFastening Type-Shell Material, FinishSilverFastening Type-Shell Material, FinishSilverFurth Rating-Subler Rated-Subler Rated		
CategoryConnectors, InterconnectsPackage-Series97Connector TypePlug, Female SocketsNumber of Positions7Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Manufacturer Part Number	97-3106A-20-15S(946)
Circular ConnectorsPackage-Series97Connector TypePlug, Female SocketsNumber of Positions7Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Features-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Manufacturer	Amphenol Industrial Operations
Package.Series97Connector TypePlug, Female SocketsNumber of Positions7Shell Size - Insert20-15Shell Size, MIL.Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientation.Ingress Protection.Shell Material, FinishAluminum, Zine Plated, BlackFeatures.Voltage - Rated.Store Rated Rated Rate.Store Rated Rate.Store Rated Rate.Store Rated Rate.Store	Category	Connectors, Interconnects
Series97Connector TypePlug, Female SocketsNumber of Positions7Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A		Circular Connectors
Connector TypePlug, Female SocketsNumber of Positions7Number of Positions20-15Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Package	-
Number of Positions7Number of Positions20-15Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Series	97
Shell Size - Insert20-15Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Connector Type	Plug, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent RatingSilva	Number of Positions	7
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedForientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Shell Size - Insert	20-15
TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Shell Size, MIL	-
Fastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Mounting Type	Free Hanging (In-Line)
OrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Termination	Solder Cup
Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Fastening Type	Threaded
Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Orientation	N (Normal)
Contact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Ingress Protection	-
Features-Voltage - Rated500VAC, 700VDCCurrent Rating23A	Shell Material, Finish	Aluminum, Zinc Plated, Black
Voltage - Rated500VAC, 700VDCCurrent Rating23A	Contact Finish	Silver
Current Rating 23A	Features	-
-	Voltage - Rated	500VAC, 700VDC
	Current Rating	23A
Report errors?		Report errors?

97-3106A-20-15S(946) Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

97-3106A-20-15S(946) Payment Methods



97-3106A-20-15S(946) Shipping Methods



If you have any question about 97-3106A-20-15S(946), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com