


97-3106A-22-19P(946)

97-3106A-22-19P(946) Information

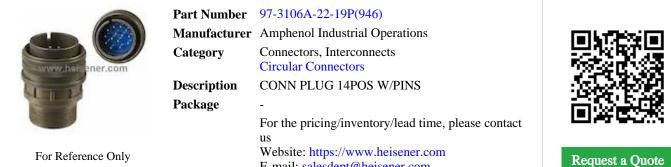

E-mail: salesdept@heisener.com

For Reference Only

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



97-3106A-22-19P(946) Specifications

Manufacturer Part Number97.3106A-22-19P(946)ManufacturerAmphenol Industrial OperationsCategoryConnectors, InterconnectsPackage-Series97Connector TypePug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverFeatures-Voltage - RatedSilverFactures-Silver Current RatingSilverFactures-Silver Factures-Silver Factur		
CategoryConnectors, Interconnects Circular ConnectorsPackage-Series97Connector TypePlug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientation.Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Shell Material, FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Manufacturer Part Number	97-3106A-22-19P(946)
Initial ConnectorsPackage-Series97Connector TypePlug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Manufacturer	Amphenol Industrial Operations
Package-Series97Connector TypePlug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Category	Connectors, Interconnects
Series97Connector TypePlug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverContact FinishSilverFeatures-Voltage - Rated30VAC, 700VDCCurrent Rating13A		Circular Connectors
Connector TypePlug, Male PinsNumber of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Package	-
Number of Positions14Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Features-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Series	97
Shell Size - Insert22-19Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact Finish-Features-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Connector Type	Plug, Male Pins
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Number of Positions	14
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Orientation-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Size - Insert	22-19
TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Size, MIL	-
Fastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Mounting Type	Free Hanging (In-Line)
OrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Termination	Solder Cup
Ingress Protection-Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Fastening Type	Threaded
Shell Material, FinishAluminum, Zinc Plated, BlackContact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Orientation	N (Normal)
Contact FinishSilverFeatures-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Ingress Protection	-
Features-Voltage - Rated500VAC, 700VDCCurrent Rating13A	Shell Material, Finish	Aluminum, Zinc Plated, Black
Voltage - Rated500VAC, 700VDCCurrent Rating13A	Contact Finish	Silver
Current Rating 13A	Features	-
-	Voltage - Rated	500VAC, 700VDC
Report errors?	Current Rating	13A
		Report errors?

97-3106A-22-19P(946) Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

97-3106A-22-19P(946) Payment Methods



97-3106A-22-19P(946) Shipping Methods



If you have any question about 97-3106A-22-19P(946), please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com