

A3C-32DA-2DSC

A3C-32DA-2DSC Information

www.beiseneh.com		A3C-32DA-2DSC Hirose Electric Co Ltd Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	回 <i>公</i> 33回 37739年
2000 F	Description	CONN RECEPT 32POS 2MM GOLD DIP	
For Reference Only	Package	- For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



A3C-32DA-2DSC Specifications

Manufacturer Part NumberA3C-32DA-2DSCManufacturerHirose Electric Co LtdCategoryConnectors, InterconnectsPackage-Package-SeriesA3Connector TypeReceptacle Schemale SocketsContact TypeReceptacleStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAIINumber of Rows2Row Spacing - MatingNor9" (2.00mm)Mounting TypePosite PositionsSolderSolderFrankationSolderFrankationSolderFortage TypeSolderFortage TypeSolderStation TypeSolderStation TypeSolderStation StationsSolderFastening TypeSolderContact Finish ThatingSolderStation ColorBiackInsulation HeightOn79" (2.00mm)			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesA3Connector TypeReceptacleConnector TypeFemale SocketContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFerminationSolderFastening TypeQualOract Finish - MatingGoldContact Finish - MatingBiakin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Manufacturer Part Number	A3C-32DA-2DSC	
Indext Connectors - Headers, Receptacles, Female SocketsPackage-SeriesA3Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079° (2.00mn)Number of Rows2Rows Spacing - MatingNorge HolePrintarionSolderFerninationSolderFerninationSolderContact Finish - MatingGoldContact Finish - MatingGoldStating TypeSolderInsulation ColorBiakInsulation HeightSolesInsulation	Manufacturer	Hirose Electric Co Ltd	
Package-SeriesA3Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.165" (4.20mm)	Category	Connectors, Interconnects	
SeriesA3Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingBin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBiakInsulation ColorBlack	Package	-	
Contact TypeFenale SocketStyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBiackInsulation ColorBlackInsulation Height0.165" (4.20mm)	Series	A3	
StyleBoard to Board or CableNumber of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldKoutat Finish Thickness - MatingBiackInsulation Height0.165" (4.20mm)	Connector Type	Receptacle	
Number of Positions32Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation ColorBlackInsulation Height0.165" (4.20mm)	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating8µin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Style	Board to Board or Cable	
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBiarkInsulation ColorBlackInsulation Height0.165" (4.20mm)	Number of Positions	32	
Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBµin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Number of Positions Loaded	All	
Row Spacing - Mating0.079" (2.00mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingBain (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBµin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating&µin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Row Spacing - Mating	0.079" (2.00mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating8μin (0.20μm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Mounting Type	Through Hole	
Contact Finish - MatingGoldContact Finish Thickness - Mating8µin (0.20µm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Termination	Solder	
Contact Finish Thickness - Mating8μin (0.20μm)Insulation ColorBlackInsulation Height0.165" (4.20mm)	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.165" (4.20mm)	Contact Finish - Mating	Gold	
Insulation Height 0.165" (4.20mm)	Contact Finish Thickness - Mating	8µin (0.20µm)	
	Insulation Color	Black	
Contact Length - Post 0.079" (2.00mm)	Insulation Height	0.165" (4.20mm)	
	Contact Length - Post	0.079" (2.00mm)	
Operating Temperature $-55^{\circ}C \sim 85^{\circ}C$	Operating Temperature	-55°C ~ 85°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Tin	
Mated Stacking Heights	5.1mm, 6mm	
Ingress Protection	-	
Features	-	
		Report errors?

A3C-32DA-2DSC Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

A3C-32DA-2DSC Payment Methods

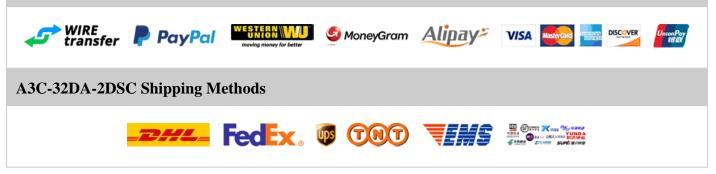

If you have any question about A3C-32DA-2DSC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com